SIGNAMARK®

Fiberglass Entry Door Systems

SELECT PROGRAM OFFERING





Pictures depicted in this brochure may have been graphically enhanced for illustration purposes.

Printer and monitor limitations prevent exact color duplication for finished products shown in this brochure.

Distinctive character is brought to life through the hand-staining expertise of our craftsmen. Unique stain variations are to be expected—these are treasured elements of the real-wood look.

Textured Glass is made up of bubbles, swirls, and lines which are part of the unique characteristic of this glass type. They will vary in shape, size, and location throughout the glass patterns which utilize it.

Cover: Metro™ Cross Reed 236 door in Smooth pre-painted Tricorn Black
This Page: 480 Lehigh® door in Cocoa Teak, 8'0" height
Back Cover: 460 9-Lite SDL door with 260 9-Lite SDL sidelites Cord in painted Smooth



1 800 235 5533

CONTACT OUR SALES TEAM FOR SPECIFIC FINISHES AND OPTIONS

4 Why Signamark®?
5 Jamb Options
6 Finish Options
7 Pre-Painted Color Options
8 Glass Types & Privacy Rating Chart
10 ENERGY STAR® Information
10 Energy Ratings Chart
12 Beauty Shot Gallery

Collections:
13 St. Jane® (STJ)
14 Sena™ (SEN)
15 Stellar™ (SLR)
16 Provence™ (PRV)
17 Turquoise™ (TUR)
18 Lehigh® (LEH)
19 Cube™ (CUB)
20 Palm Springs™ (PSP)
21 Lone Star™ (LST)
22 Solitaire™ (SOL)
23 Classic (CLA)
24 Iron Jane™ (IRJ)
25 Portofino™ (PTF)
26 Craftsman Collection
27 Metro™
28 Textured Obscure
30 Simulated Divided Lites (SDL)
32 Panel Doors
33 Builder and Fire Doors
34 Impact Rated
36 Clear Low-E (CLR)
36 Internal Grille Low-E (GBG)
36 Molded SDL Grilles (CGS)
37 Internal Mini Blinds Low-E (MBL)
37 Impact Internal Mini Blinds Low-E (MBL)
37 Vent Lites Low-E (VNT)
38 8'0" Height

40 Rough Opening, Swing, Handing
42 Warranty Information
43 Finishing Instructions

WHY SIGNAMARK®?

Our standard product features are usually found as upgrade options with other doors.

Curb Appeal
- High definition panel embossments
- Matching glass caming, sill, and hinge finish
- True resemblance of a real wood door

Security
- 16" wood lockblock & jamb security plate
- Laminated veneer lumber (LVL) door stiles
- Molded open panel design for glass inserts
- Safety tempered glass

Durability
- Composite on all 6 sides of door slab – no exposed wood#
- Fiberglass door panels won't dent, rust, rot, or crack
- PVC jambs will not rot or absorb moisture (no Sill Key™ System needed)
- Sill Key™ System (on wood jambs) doesn't allow jamb bottom to sit on sub floor or sill where it is susceptible to water damage**
- Ball bearing hinge prevents door sag and hinge wear
- Composite bottom rail with door sweep & composite adjustable threshold

Energy Efficiency
- Injected polyurethane foam core
  Up to 5 times more energy efficient than wood
  – 100% CFC free (environmentally friendly)
  – Superior density
- Triple pane decorative glass
  – Secured by our high performance lite frame
- Foam compression weatherstrip helps seal out drafts

ASK ABOUT ENERGY STAR

Signamark® proudly offers ENERGY STAR certified door models in all 50 states.



Palm Springs™ 445 in Cherry Mahogany, white PVC jamb

INDUSTRY LEADING WARRANTY

Door: Limited Lifetime Warranty
Stain Finish: 5-Year Warranty
Paint Finish: 5-Year Warranty
Glass: 10-Year Warranty

LIFETIME LIMITED WARRANTY

5 YEAR FINISH WARRANTY

10 YEAR GLASS WARRANTY

Exception of fire rated doors
** Maximum protection is achieved only when the door system is installed and caulked properly.

SIGNAMARK® JAMB OPTIONS

White Woodgrain PVC Jamb System (Standard)

UNFINISHED
Ready to paint



Primed Finger-Jointed Wood Jamb* (Option)

UNFINISHED
Ready to paint







Sill Key™ System (wood jambs)


Pre-Colored Woodgrain PVC Jamb System (Upgrade Option)

Available option on Woodgrain Fiberglass. Note: Designed to complement the overall door finish; color will not match hand stained finishes perfectly.


Mahogany Pre-Colored







Oak Pre-Colored






Teak Pre-Colored





Hand Stained Woodgrain PVC Jamb System (Upgrade Option)

This is a hand stained woodgrain PVC jamb option that offers full non rot protection and is hand stained to best complement our hand stained door finishes.

Woodgrain Mahogany Finishes







Woodgrain Oak Finishes








Woodgrain Teak Finish



Pre-Colored White PVC Jamb System

Available on both woodgrain and smooth fiberglass



Note: A close up of the door system—jamb on the left and door panel on the right—shown in the images above.

* Comes standard with the Sill Key™ System.


Call your Sales Representative for finish availabilities in your market.

TEAK WOODGRAIN FINISHES

Unfinished Teak also available





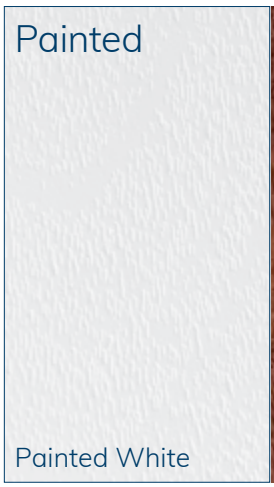







MAHOGANY WOODGRAIN FINISHES

Unfinished Mahogany also available

OAK WOODGRAIN FINISHES









In these days of repetitive architecture, there are fewer ways of making your home stand out from the neighbors. Customizing your home without a major investment is a big challenge. The perfect solution is a hand stained Teak, Mahogany, or Oak woodgrain front entry door glazed with handcrafted glass. Your home will immediately make a statement your friends are sure to notice. Our hand finishing process creates a custom looking door. The grain pattern of the door and lite frame provide a realistic wood appearance without the maintenance. Enhance your home for many years with a long lasting and durable fiberglass entry door.

Printer and monitor limitations prevent exact color duplication for finished products shown in this brochure.



SMOOTH FINISH

Ready to paint or Pre-painted

PRE-PAINTED COLOR OPTIONS

Smooth finish only



Sena™ 420 door with 160 sidelites in Smooth pre-painted Tricorn Black

Pre-painted Pure White

Pre-painted Tricorn Black

INDUSTRY LEADING WARRANTY

5 YEAR

FINISH WARRANTY

Pre-painted available for Smooth finish only

- Durable paint finish
- Two-color option available
- Touch up bottle included with all special orders
- 5-Year Finish Warranty
- Jamb options available
  - Unfinished white woodgrain PVC
  - Pre-colored white PVC jamb
  - Custom painted PVC jambs
    4-9/16", 5-1/4", and 6-9/16" widths

GLASS TYPES


Decorative Collections are comprised of combinations of the glass types shown here. These unique finished designs are held in place by decorative camings and hand-pieced together by our team of artisans and craftsmen. Traditional techniques of creating art glass produce textures, swirls, and air bubbles that add individual character to the glass. These purposeful and unique qualities are integral to the expressive nature of the art glass.

Textured Obscure Collection*: Cord, Cross Reed, Hammered, Privacy, Reeded, Rain Fall™, and Sandstone™ are available in full glass panel options. See pages 28-29, Metro™ and SDL Collections.


Glue Chip



Clear Texture


Gray Texture

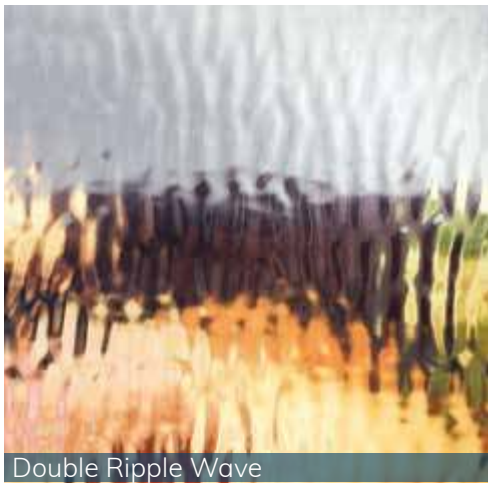

Double Ripple Wave


Ripple Wave


Rose Ripple Wave

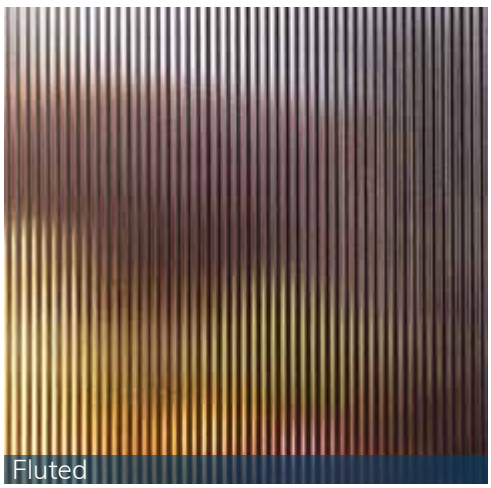
Fluted


Reeded*

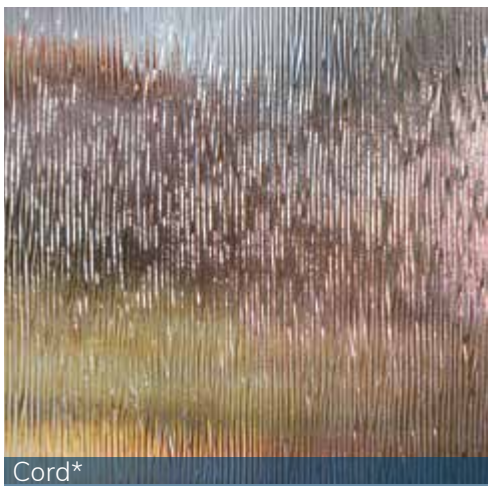

Cord*



Privacy*


Cross Reed*



Rain Fall™*


Hammered*

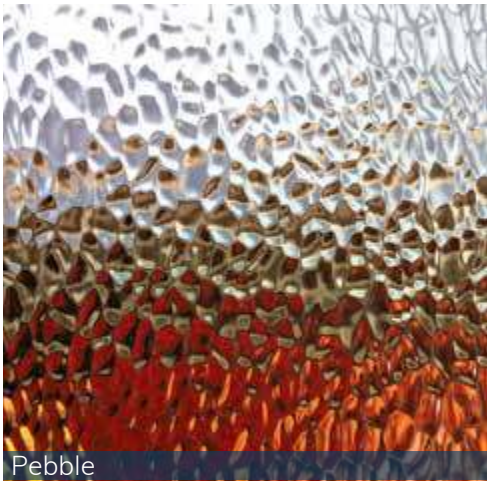
Pebble

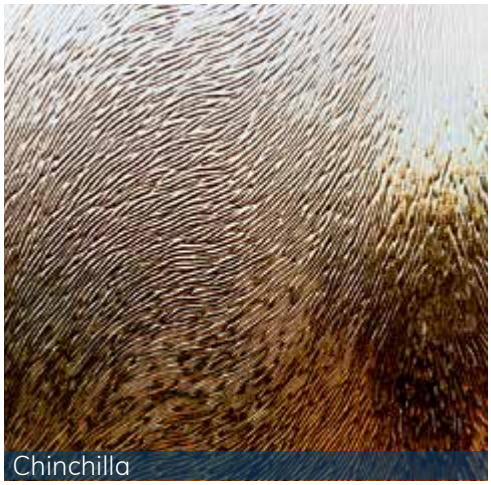
Chinchilla


Granite

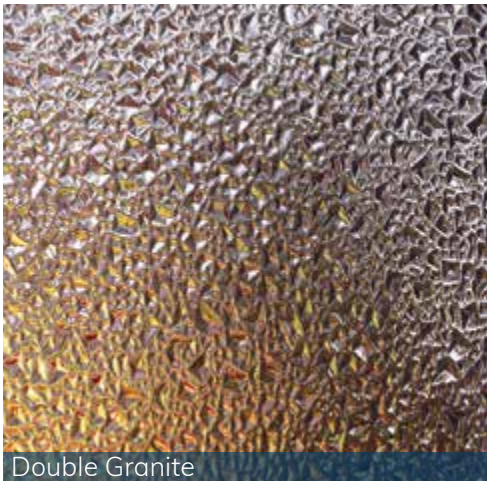
Double Granite


Sandstone™*


Amber Streak Opaque


Patina Caming


Zinc Caming


Clear Bevel


Glue Chip Bevel


Jewel

Privacy Rating Chart (PR)



1 Less Private

10 More Private

Our glass collections are assigned a privacy rating based on the overall obscurity of the glass types used.

ENERGY STAR

All Signamark® Fiberglass Doors are energy efficient and designed to stand up to all seasons so your home stays warm during the winter months and cool during the summer. Imagine the savings from a fiberglass door which is up to five times more energy efficient than a traditional wood door.

Many of our doors are ENERGY STAR certified. The chart beginning below and continuing on page 11 shows a listing of the U-Factor and SHGC (Solar Heat Gain Coefficient) for all of our Entry Door Products. Certified units must hit the U-Factor, Solar Heat Gain Coefficient in their climate zone, and air leakage listed in the chart to the right.

Visit energystar.gov for your area's climate zone detail.

ASK ABOUT ENERGY STAR

Signamark® offers ENERGY STAR certified door models in all 50 states.

Version 7.0 Effective: 10/23/2023

Glazing Level	Climate Zone	U-Factor[1]	SHGC[2]
Opaque	All Zones	≤ 0.17	No Rating
≤ ½-Lite	All Zones	≤ 0.23	≤ 0.23
> ½-Lite	Northern	≤ 0.26	≤ 0.40
	North-Central		
	South-Central	≤ 0.28	≤ 0.23
	Southern		

Air Leakage for Swinging Doors ≤ 0.5 cfm/ft²
[1] Btu/h·ft²·°F
[2] Solar Heat Gain Coefficient

U-Factor: The heat transfer per time per area and per degree of temperature difference. The U-factor multiplied by the interior–exterior temperature difference and by the projected fenestration product area yields the total heat transfer through the fenestration product due to conduction, convection, and long wave infrared radiation. Expressed here in units of Btu/h·ft²·°F.

Solar Heat Gain Coefficient (SHGC): The ratio of the solar heat gain entering the space through the fenestration product to the incident solar radiation. Expressed as a value between 0 and 1.

Air Leakage (AL): Measures the rate at which air passes through joints in the window. AL is measured in cubic feet of air passing through one square foot of window area per minute. The lower the AL value, the less air leakage. Most industry standards and building codes require an AL of 0.3 cf·m/ft².

ENERGY RATINGS INFORMATION – PVC JAMBS

In some years the government has offered a federal tax credit for energy efficient products that meet or exceed ENERGY STAR performance levels for doors. Please visit irs.gov and energystar.gov for additional information regarding tax credit availability or visit signamark.com for additional information regarding energy efficiency. **PVC jamb ratings are shown in chart.**

NFRC Size Designation	Signamark Door Description
1/4 Lite ≤ 410 sq in	150, 160, 206 (All), 208x3, 232x3, 236x3, 243, 248, 300, 310 (All), 325, 400, 408x3, 420, 425
1/2 Lite ≤ 900 sq in	160x2, 232x4, 236x4, 236x5, 236x6, 420x3, 430, 525, 529, 550, 555
3/4 Lite ≤ 1100 sq in	420x4, 440, 445
Full Lite > 1100 sq in	360, 460, 480
Opaque/No Glass	All Panel Doors

NFRC Size Designation	Signamark Sidelite Description
1/4 Lite ≤ 65 sq in	N/A
1/2 Lite ≤ 281 sq in	145, 206 (All), 225, 230
3/4 Lite ≤ 391 sq in	160, 240, 243, 245, 248
Full Lite > 391 sq in	260, 265, 280
Opaque/No Glass	N/A

ENERGY RATINGS CHART

Will not qualify under ENERGY STAR guidelines.

Will not qualify in the Northern and North-Central climate zones under ENERGY STAR guidelines.

Note: Transoms do not qualify for the tax credit. Any tax credit, if available, would be based on "qualified" Door with Sidelites or Double Door configuration.
Note: **Ratings shown here are with PVC Jamb.** Wood jamb ratings can be found in the Performance Data section of our Resources on signamark.com.

Teak Woodgrain Style Fiberglass Entry Doors & Sidelites

TYPE	SWING	GLAZING	1/4 Lite ≤ 410 sq in		1/2 Lite ≤ 900 sq in		3/4 Lite ≤ 1100 sq in		Full Lite > 1100 sq in	
			U-factor	SHGC	U-factor	SHGC	U-factor	SHGC	U-factor	SHGC
Fiberglass Door	Inswing & Outswing	Triple Pane—Decorative/Obscure (5mm) Glass	0.22	0.10	0.26	0.18	N/A	N/A	N/A	N/A
		Triple Pane—Obscure (5mm) Glass with Grid	N/A	N/A	0.26	0.14	N/A	N/A	N/A	N/A
		Dual Pane—Low E-270 (Clear)	0.21	0.08	0.25	0.15	N/A	N/A	N/A	N/A
		Dual Pane—Low E-270 (Internal Grille)	N/A	N/A	0.25	0.15	N/A	N/A	N/A	N/A

TYPE	SWING	GLAZING	1/4 Lite ≤ 65 sq in		1/2 Lite ≤ 281 sq in		3/4 Lite ≤ 381 sq in		Full Lite > 381 sq in	
Fiberglass Sidelite	Inswing & Outswing	Triple Pane—Decorative/Obscure (5mm) Glass	N/A	N/A	N/A	N/A	N/A	N/A	0.29	0.17
		Dual Pane—Low E-270 (Clear)	N/A	N/A	N/A	N/A	N/A	N/A	0.28	0.14
Air Leakage ≤ 0.3 cfm/ft²										

Mahogany Woodgrain Style Fiberglass Entry Doors & Sidelites

TYPE	SWING	GLAZING	1/4 Lite ≤ 410 sq in		1/2 Lite ≤ 900 sq in		3/4 Lite ≤ 1100 sq in		Full Lite > 1100 sq in	
			U-factor	SHGC	U-factor	SHGC	U-factor	SHGC	U-factor	SHGC
Fiberglass Door	Inswing & Outswing	Triple Pane—Decorative/Obscure (5mm) Glass	0.20	0.09	0.23	0.15	0.26	0.20	N/A	N/A
		Triple Pane—Low E Decorative/Obscure (5mm) Glass	0.19	0.07	0.22	0.12	0.23	0.16	N/A	N/A
		Dual Pane—Craftsman 6-Lite (Mahogany/Smooth)	0.23	0.10	N/A	N/A	N/A	N/A	N/A	N/A
		Dual Pane—Low E-270 (Clear/Craftsman)	0.20	0.08	N/A	N/A	0.25	0.20	N/A	N/A
		Dual Pane—Low E Wrought Iron	0.19	0.07	0.23	0.13	0.25	0.17	N/A	N/A
		Triple Pane—Laminated Impact Glass	0.20	0.08	0.24	0.15	0.26	0.20	N/A	N/A
		Opaque/No Glass (Flush/Embossed)	U-Factor = 0.15	SHGC = 0.01						

TYPE	SWING	GLAZING	1/4 Lite ≤ 65 sq in		1/2 Lite ≤ 281 sq in		3/4 Lite ≤ 391 sq in		Full Lite > 391 sq in	
Fiberglass Sidelite	Inswing & Outswing	Triple Pane—Decorative/Obscure (5mm) Glass	N/A	N/A	0.21	0.09	0.23	0.12	0.26	0.16
		Dual Pane—Low E Wrought Iron	N/A	N/A	0.21	0.08	0.23	0.10	0.25	0.13
		Dual Pane—Low E-270 (Clear/Internal Grille/SDL)	N/A	N/A	0.21	0.08	N/A	N/A	0.25	0.14
		Triple Pane—Laminated Impact Glass	N/A	N/A	0.22	0.09	0.23	0.11	0.26	0.15
		Dual Pane—Low E (Mini Blind UP)	N/A	N/A	N/A	N/A	0.28	0.11	N/A	N/A
Air Leakage ≤ 0.3 cfm/ft²										

Oak Woodgrain and Smooth Style Fiberglass Entry Doors & Sidelites

TYPE	SWING	GLAZING	1/4 Lite ≤ 410 sq in		1/2 Lite ≤ 900 sq in		3/4 Lite ≤ 1100 sq in		Full Lite > 1100 sq in	
			U-factor	SHGC	U-factor	SHGC	U-factor	SHGC	U-factor	SHGC
Fiberglass Door	Inswing & Outswing	Triple Pane—Decorative/Obscure (5mm) Glass	0.19	0.09	0.21	0.15	0.22	0.20	0.24	0.27
		Triple Pane—Low E Decorative/Obscure (5mm) Glass	0.18	0.07	0.20	0.12	0.21	0.16	0.23	0.21
		Dual Pane—Low E Wrought Iron	0.19	0.07	0.22	0.13	0.24	0.17	0.27	0.23
		Dual Pane—Low E-270 (Clear/Internal Grille)	0.19	0.08	0.22	0.15	0.24	0.20	0.27	0.26
		Dual Pane—Low E (Mini Blind UP)	N/A	N/A	0.26	0.12	0.29	0.16	0.32	0.21
		Opaque/No Glass (Flush/Embossed)	U-Factor = 0.16	SHGC = 0.01						

TYPE	SWING	GLAZING	1/4 Lite ≤ 65 sq in		1/2 Lite ≤ 281 sq in		3/4 Lite ≤ 381 sq in		Full Lite > 381 sq in	
Fiberglass Sidelite	Inswing & Outswing	Triple Pane—Decorative/Obscure (5mm) Glass	0.17	0.02	0.19	0.08	0.19	0.11	0.20	0.14
		Dual Pane—Low E Wrought Iron	0.18	0.02	0.21	0.07	0.23	0.09	0.25	0.12
		Dual Pane—Low E-270 (Clear/Internal Grille)	0.18	0.02	0.21	0.08	0.23	0.11	0.25	0.14
		Dual Pane—Low E (Mini Blind UP)	N/A	N/A	0.25	0.05	0.28	0.06	0.32	0.09
Air Leakage ≤ 0.3 cfm/ft²										

Flush-glazed Teak Woodgrain, Oak Woodgrain, and Smooth Style Fiberglass Entry Doors & Sidelites

TYPE	SWING	GLAZING	1/4 Lite ≤ 410 sq in		1/2 Lite ≤ 900 sq in		3/4 Lite ≤ 1100 sq in		Full Lite > 1100 sq in	
			U-factor	SHGC	U-factor	SHGC	U-factor	SHGC	U-factor	SHGC
Fiberglass Door	Inswing & Outswing	Triple Pane—Laminated Impact Glass	0.21	0.08	0.24	0.15	0.27	0.20	0.30	0.26
		Triple Pane—Decorative/Obscure (5mm) Glass	0.21	0.09	0.24	0.15	0.26	0.20	0.30	0.27
		Triple Pane—Low E Decorative/Obscure (5mm) Glass	0.20	0.07	0.22	0.12	0.24	0.16	0.27	0.21
		Triple Pane—Laminated Low E Impact Glass	0.20	0.07	0.23	0.12	0.25	0.16	0.28	0.21
		Dual Pane—Laminated Low E Impact Glass	0.20	0.08	0.23	0.15	0.25	0.19	0.27	0.25
		Dual Pane—Low E Wrought Iron	0.20	0.07	0.23	0.13	0.25	0.17	0.28	0.23
		Dual Pane—Low E-270 (Clear/Internal Grille)	0.19	0.05	0.22	0.10	0.23	0.13	0.26	0.16
		Dual Pane—Low E (Mini Blind UP)	N/A	N/A	N/A	N/A	N/A	N/A	0.34	0.22
		Dual Pane—Laminated Low E Impact (Mini Blind UP)	N/A	N/A	N/A	N/A	N/A	N/A	0.32	0.21

TYPE	SWING	GLAZING	1/4 Lite ≤ 65 sq in		1/2 Lite ≤ 281 sq in		3/4 Lite ≤ 391 sq in		Full Lite > 391 sq in	
Fiberglass Sidelite	Inswing & Outswing	Triple Pane—Laminated Impact Glass	N/A	N/A	0.24	0.15	0.26	0.19	0.30	0.26
		Triple Pane—Decorative/Obscure (5mm) Glass	N/A	N/A	0.23	0.15	0.26	0.20	0.29	0.27
		Triple Pane—Laminated Low E Impact Glass	N/A	N/A	0.22	0.12	0.24	0.16	0.27	0.21
		Dual Pane—Laminated Impact Glass	N/A	N/A	0.26	0.18	0.29	0.24	0.33	0.32
		Dual Pane—Laminated Low E Impact Glass	N/A	N/A	0.22	0.14	0.24	0.19	0.27	0.25
		Dual Pane—Low E Wrought Iron	N/A	N/A	0.23	0.13	0.25	0.17	0.28	0.23
		Dual Pane—Low E-270 (Clear/Internal Grille)	N/A	N/A	0.21	0.10	0.23	0.12	0.25	0.16
		Dual Pane—Low E (Mini Blind UP)	N/A	N/A	N/A	N/A	N/A	N/A	0.33	0.22
		Dual Pane—Laminated Low E Impact (Mini Blind UP)	N/A	N/A	N/A	N/A	N/A	N/A	0.31	0.21
Air Leakage ≤ 0.3 cfm/ft²										

■ Does not meet 2023 Florida Energy Code Criteria for SHGC.










ST. JANE®

Glass Code = STJ | A Clear Texture | B Clear Bevel | C Ripple Wave | D Gray Texture

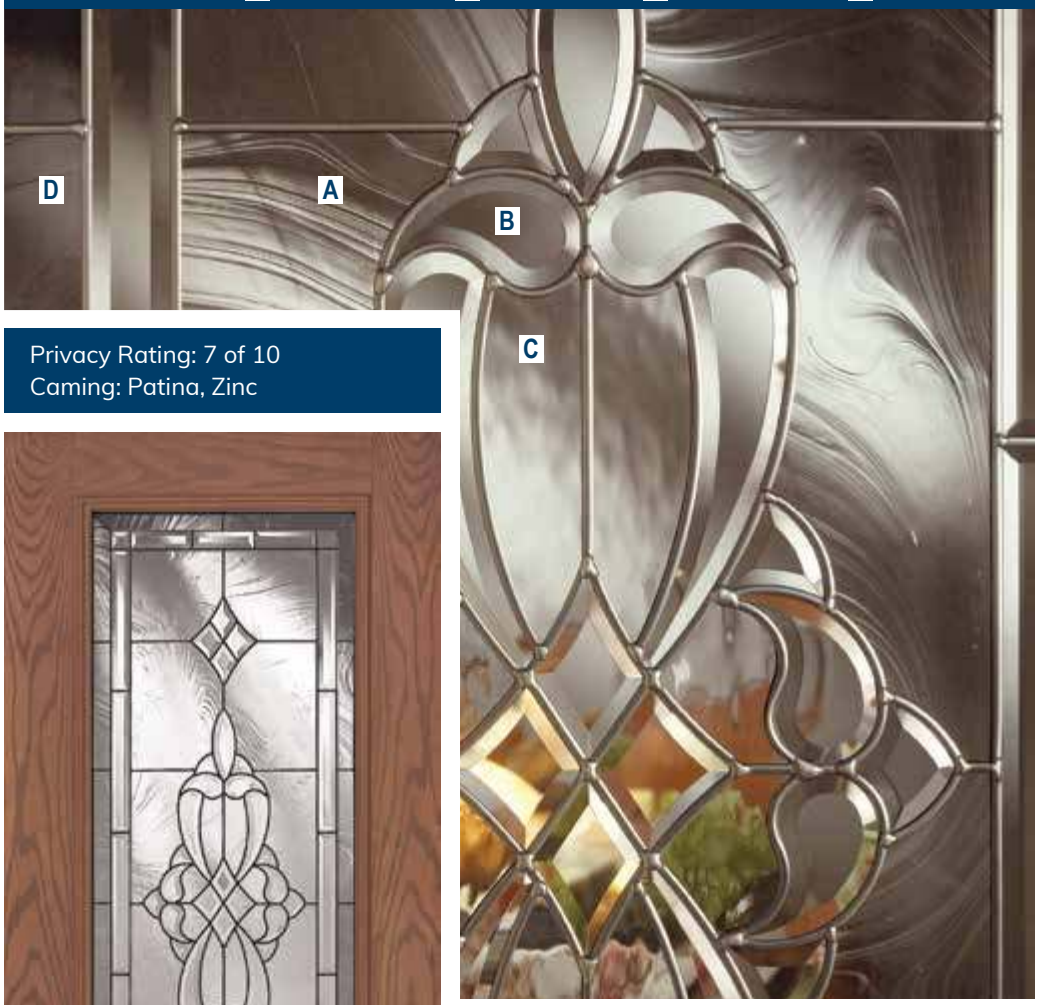


Privacy Rating: 7 of 10
Caming: Patina, Zinc


STJ550 Mahogany


STJ460 Oak


STJ430 Smooth


MAHOGANY



OAK

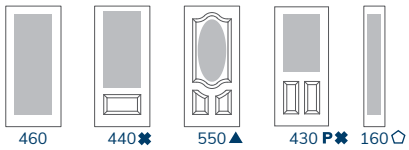

SMOOTH



Impact rated options available on page 35

NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

▲ 34" also
✖ 32" also
★ 32" & 34" also
Z Zinc only
P Patina only
□ 14" only
△ 10" & 12" only
⬠ 10" also

6'8" height doors and sidelites

All doors and sidelites in the 6'8" St. Jane® Collection are ENERGY STAR certified for all 50 states


SENA™

Glass Code = SEN


A Double Ripple Wave B Rose Ripple Wave
C Amber Streak Opaque

Privacy Rating: 8 of 10
Caming: Patina



SEN525 Teak

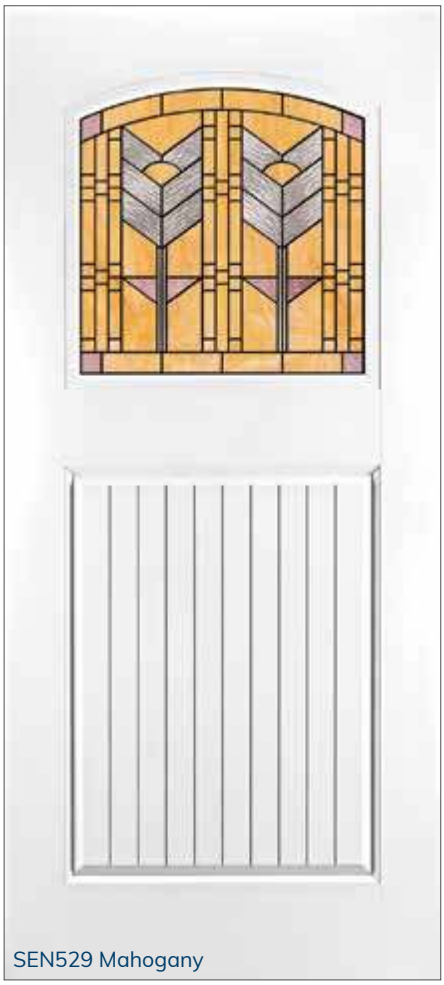
SEN529 Mahogany

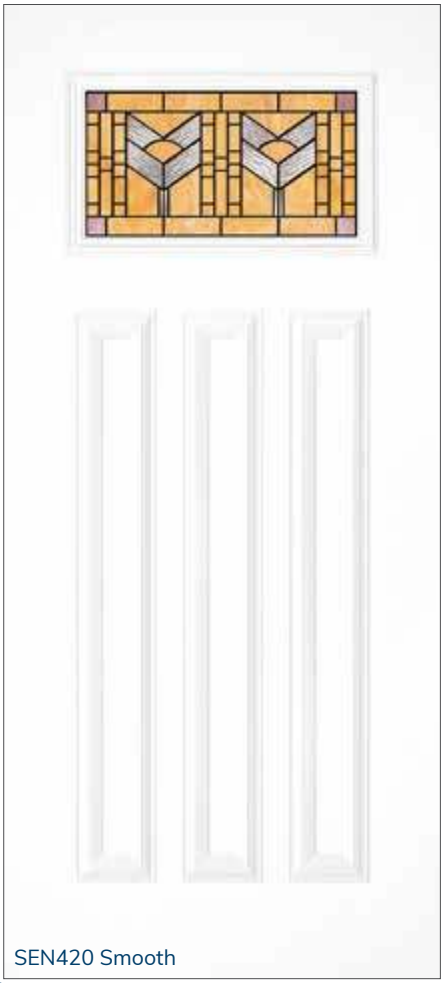



SEN420 Smooth


TEAK




MAHOGANY



OAK



SMOOTH




NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

■ 30" & 32" only
▲ 34" also
✖ 32" also
★ 32" & 34" also
□ 14" only
△ 10" & 12" only
⬠ 10" also

6'8" height doors and sidelites



^ Screwed-on dentil shelf option

Most doors and sidelites in the 6'8" Sena™ Collection are ENERGY STAR certified for all 50 states



SLR550 Mahogany

STELLAR™

Glass Code = SLR

A Clear Bevel **B** Ripple Wave **C** Double Granite

Also contains Glue Chip glass




Privacy Rating: 5 of 10
Caming: Patina, Zinc




SLR243 Oak


MAHOGANY



OAK

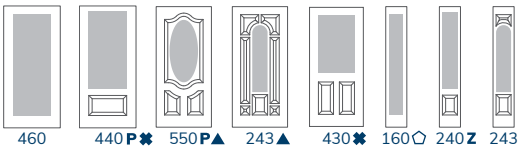

SMOOTH

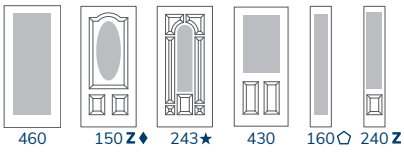

NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

✖ 32" also
▲ 34" also
★ 32" & 34" also
♦ 30", 32" & 34" also
□ 14" only
△ 10" & 12" only
⬠ 10" also
Z Zinc only
P Patina only

6'8" height doors and sidelites



SLR430 Smooth




Stellar™ 243 doors in Walnut Oak

All doors and sidelites in the 6'8" Stellar™ Collection are ENERGY STAR certified for all 50 states

PROVENCE™

Glass Code = PRV


A Granite **B** Double Granite **C** Jewel
D Glue Chip **E** Glue Chip Bevel

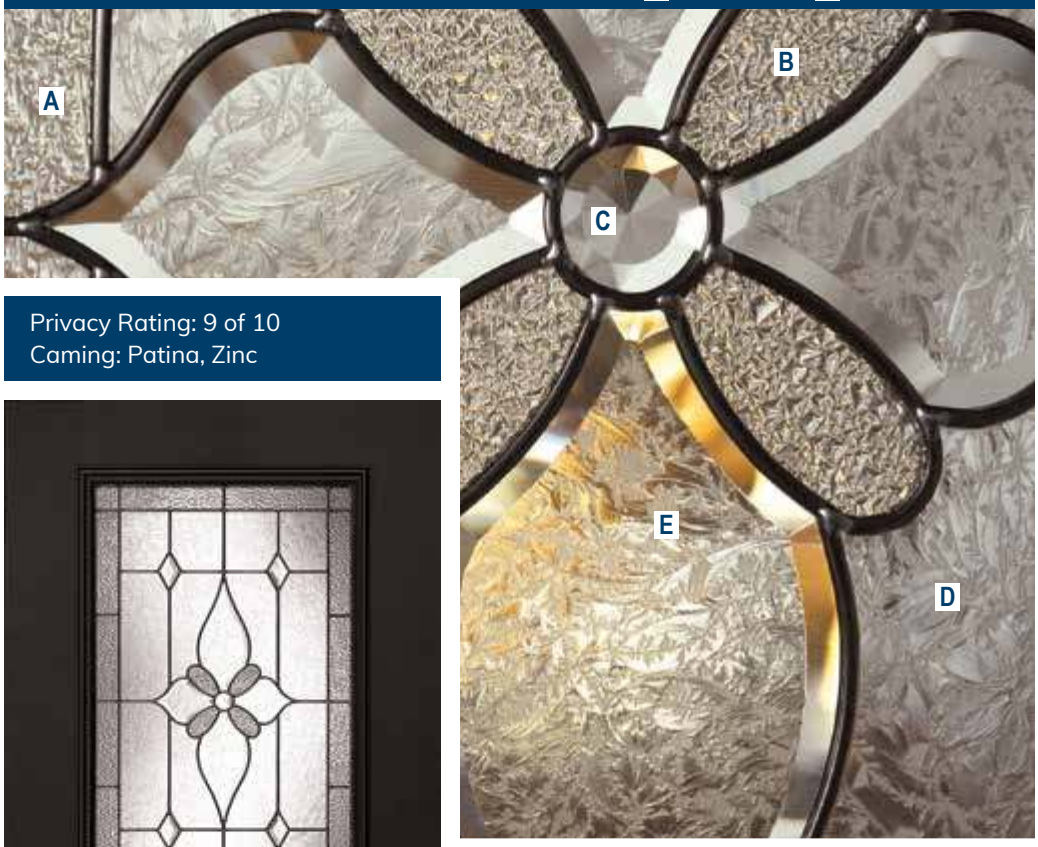

Privacy Rating: 9 of 10
Caming: Patina, Zinc


PRV550 Mahogany


PRV430 Smooth

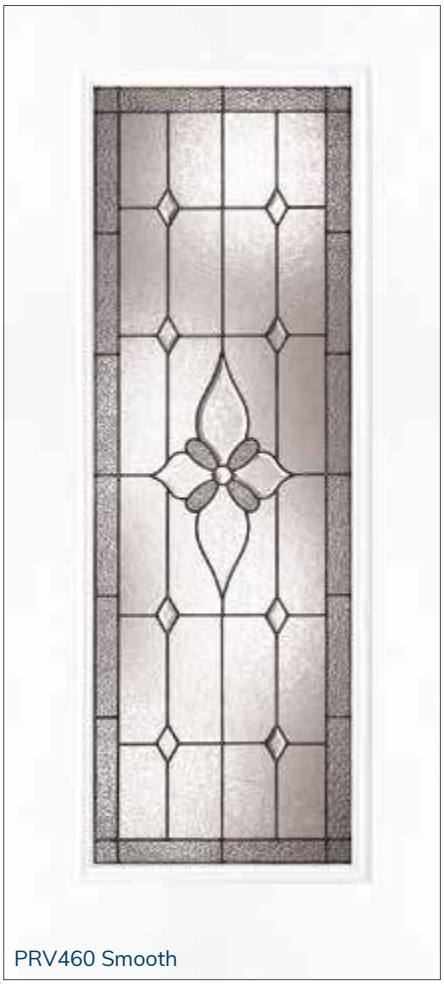
PRV460 Smooth

NOTES


Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

▲ 34" also
✖ 32" also
★ 32" & 34" also
♦ 30", 32" & 34" also
△ 10" & 12" only
⬠ 10" also
Z Zinc only
P Patina only


6'8" height doors and sidelites


All doors and sidelites in the 6'8" Provence™ Collection are ENERGY STAR certified for all 50 states

MAHOGANY



550 Z★ 160 △


OAK


460 243 Z▲ 550 Z▲ 430 P✖ 400 Z▲


160 ⬠ 240 Z 243 Z

SMOOTH



460 243 Z★ 150 Z♦ 430 P 400 Z▲


160 ⬠ 240 Z

TURQUOISE™

Glass Code = TUR

A Clear Bevel **B** Glue Chip **C** Ripple Wave

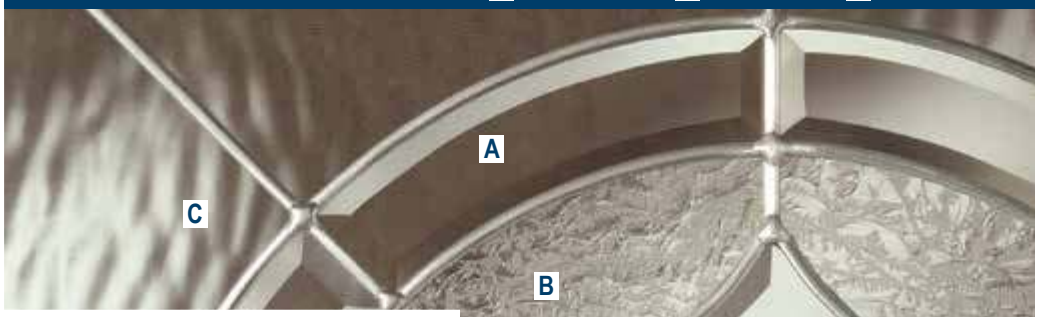




TUR243 Smooth

Privacy Rating: 7 of 10
Caming: Zinc



TUR460 Oak

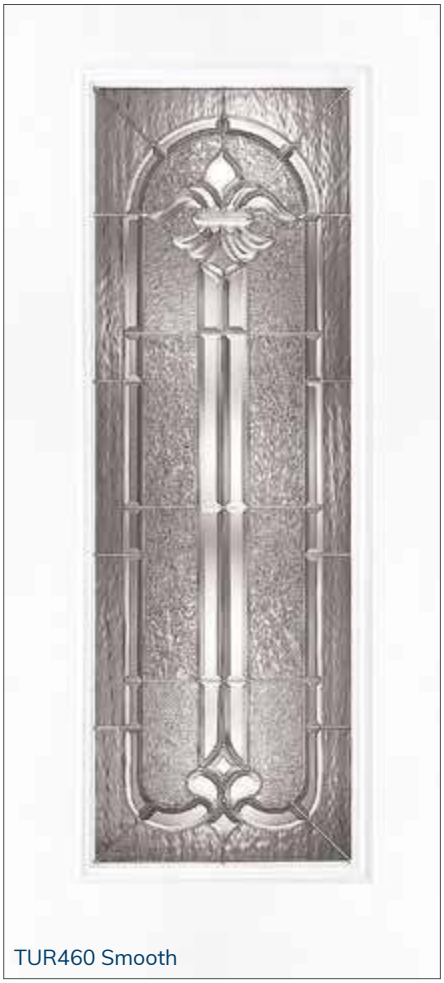

TUR460 Smooth


NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"


▲ 34" also ⬠ 10" also
★ 32" & 34" also

6'8" height doors and sidelites

OAK



SMOOTH



All doors and sidelites in the 6'8" Turquoise™ Collection are ENERGY STAR certified for all 50 states

Impact rated options available on page 35

LEHIGH®

Glass Code = LEH

A Clear Bevel **B** Double Granite **C** Fluted



Privacy Rating: 6 of 10
Caming: Patina, Zinc



Lehigh® 445 door with 245 sidelites in Chestnut Mahogany



LEH430 Oak



LEH425 Mahogany



LEH420 Smooth


NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

■ 30" & 32" only
▲ 34" also
✖ 32" also
★ 32" & 34" also
□ 14" only
△ 10" & 12" only
⬠ 10" also
P Patina only

6'8" height doors and sidelites


TEAK / OAK / SMOOTH



480 **P**


8'0" height door – See page 38

MAHOGANY




445 **P** 425^**P** 425^**P▲** 160△ 265 **P** □ 145 **P** △ 245 **P** □

OAK




360 **P** ■ 460 440 ✖ 430 ✖ 420 **P** ✖ 160⬠ 230 **P**

SMOOTH



360 **P** ■ 460 430 425 **P▲** 420 **P** ★ 160⬠ 230 **P**



^ Screwed-on dentil shelf option


All doors and sidelites in the 6'8" Lehigh® Collection are ENERGY STAR certified for all 50 states

Impact rated options available on page 35

CUBE™

Glass Code = CUB


A Clear Bevel B Chinchilla C Pebble

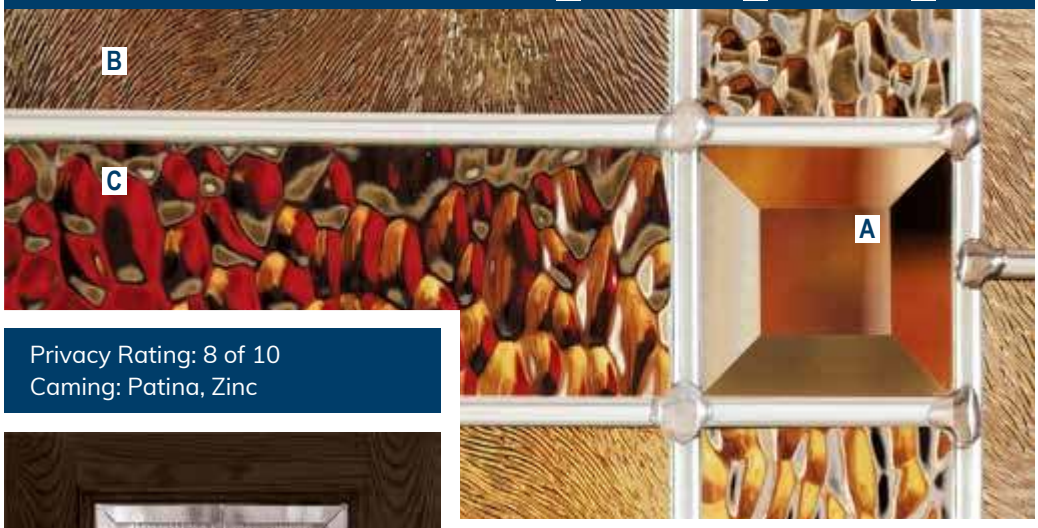

Privacy Rating: 8 of 10
Caming: Patina, Zinc


CUB550 Mahogany


CUB440 Oak

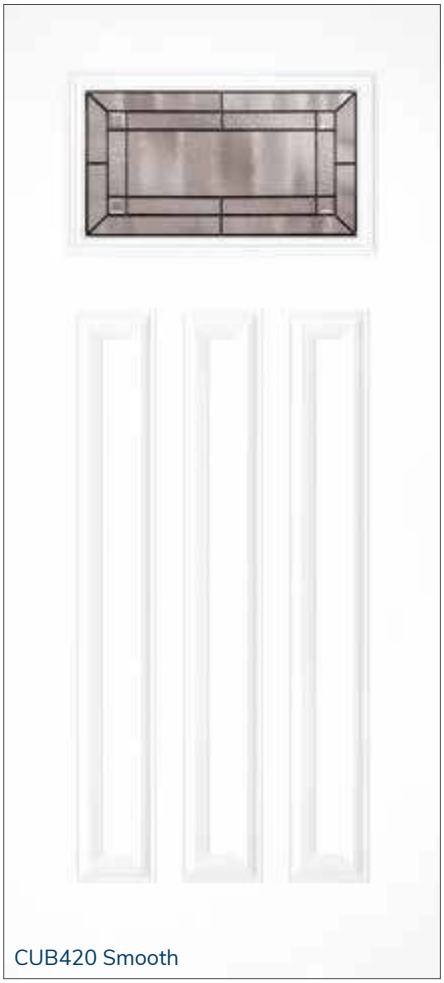
CUB420 Smooth

Transom options also available – contact our sales team for specific information


NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"


■ 30" & 32" only
▲ 34" also
✖ 32" also
★ 32" & 34" also
♦ 30", 32" & 34" also
□ 14" only
△ 10" & 12" only
⬠ 10" also
Z Zinc only

6'8" height doors and sidelites


TEAK



525^▲ 260

MAHOGANY

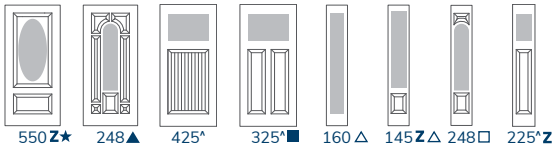

550Z★ 248▲ 425^ 325^■ 425^▲ 160△ 265□ 145Z△ 245Z□ 248□ 225^Z

OAK


360Z■ 460 440Z✖ 550Z▲ 243▲ 430Z✖ 420✖


160⬠ 240Z 243 230Z

SMOOTH

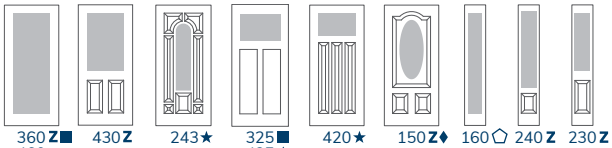
360Z■ 460 430Z 243★ 325■ 425▲ 420★ 150Z♦ 160⬠ 240Z 230Z

Impact rated options available on page 35


^ Screwed-on dentil shelf option

Most doors and sidelites in the 6'8" Cube™ Collection are ENERGY STAR certified for all 50 states

PALM SPRINGS™

Glass Code = PSP

A Ripple Wave B Fluted C Privacy D Cord

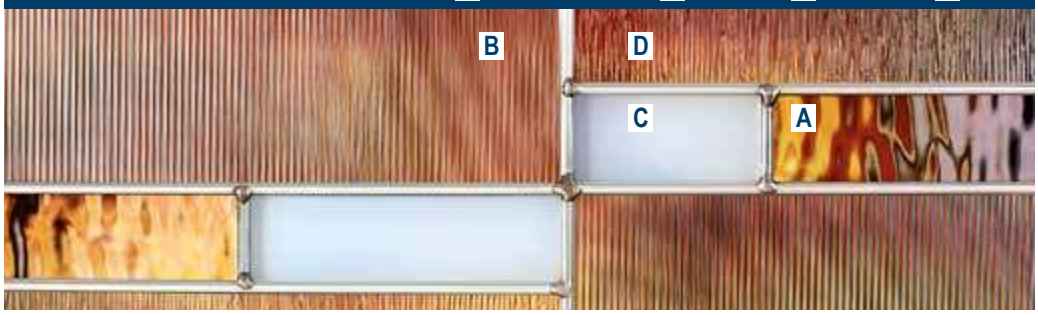


PSP445 Mahogany

Privacy Rating: 8 of 10
Caming: Zinc


PSP460 Oak


MAHOGANY


445

OAK



460


440✖


430✖

SMOOTH


460


430


PSP430 Smooth

NOTES

Unless otherwise noted:
– All doors available in 36"
✖ 32" also

6'8" height doors and sidelites

As viewed from outside,
left-handed inswing doors


All doors and sidelites in the 6'8" Palm Springs™ Collection are ENERGY STAR certified for all 50 states


Palm Springs™ 460 doors
in Smooth pre-painted Pure White

LONE STAR™

Glass Code = LST

A Clear Bevel **B** Reeded **C** Granite **D** Glue Chip

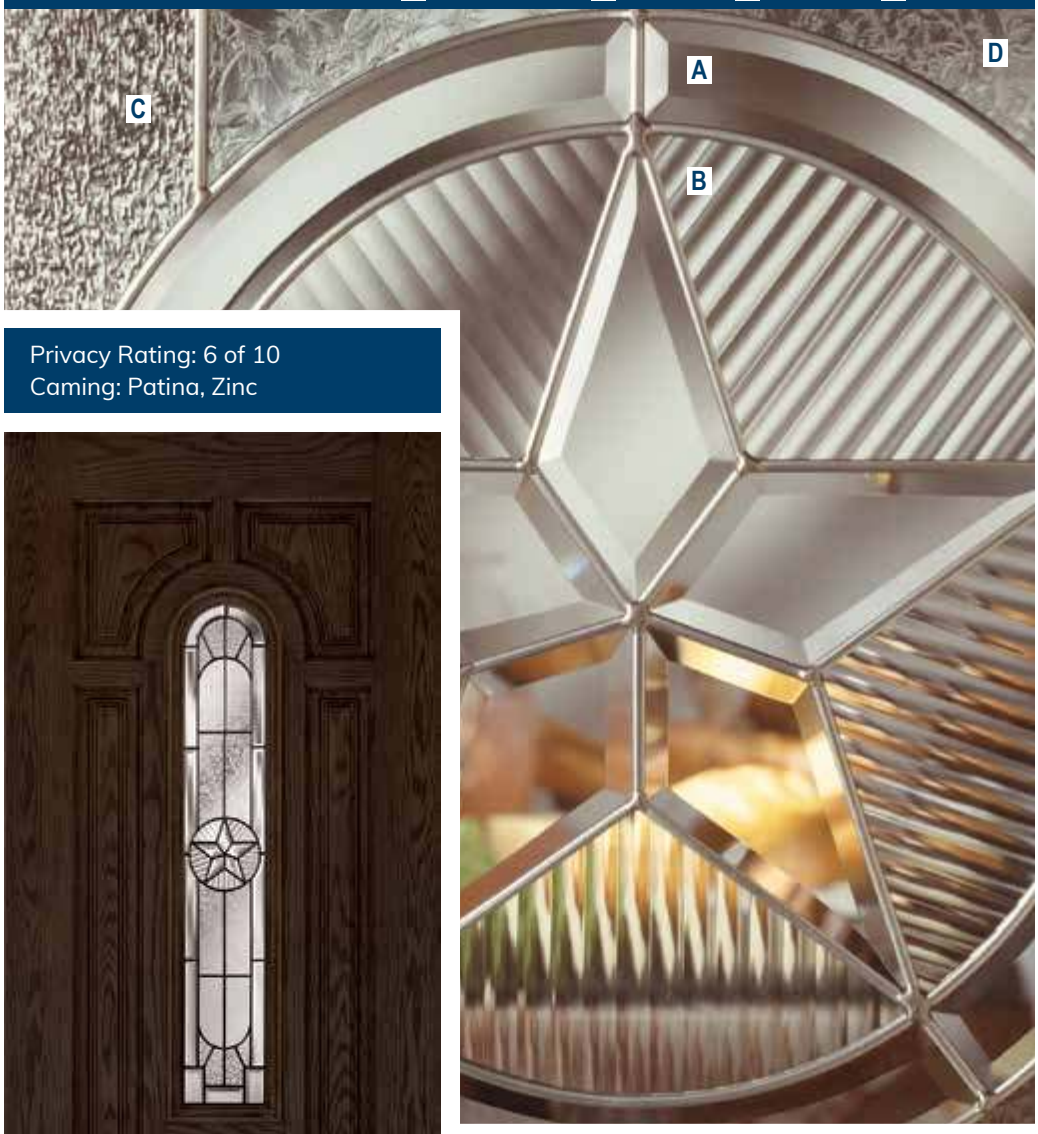



LST445 Mahogany

Privacy Rating: 6 of 10
Caming: Patina, Zinc

LST243 Oak



LST150 Smooth

NOTES


Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

▲ 34" also ⬠ 10" also **P** Patina only
★ 32" & 34" also △ 10" & 12" only **Z** Zinc only
♦ 30", 32" & 34" also


6'8" height doors and sidelites

All doors and sidelites in the 6'8" Lone Star™ Collection are ENERGY STAR certified for all 50 states


MAHOGANY



OAK

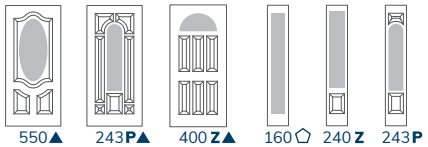

SMOOTH




SOLITAIRE™



SOL460 Oak

Glass Code = SOL

A Clear Bevel B Glue Chip C Granite D Jewel

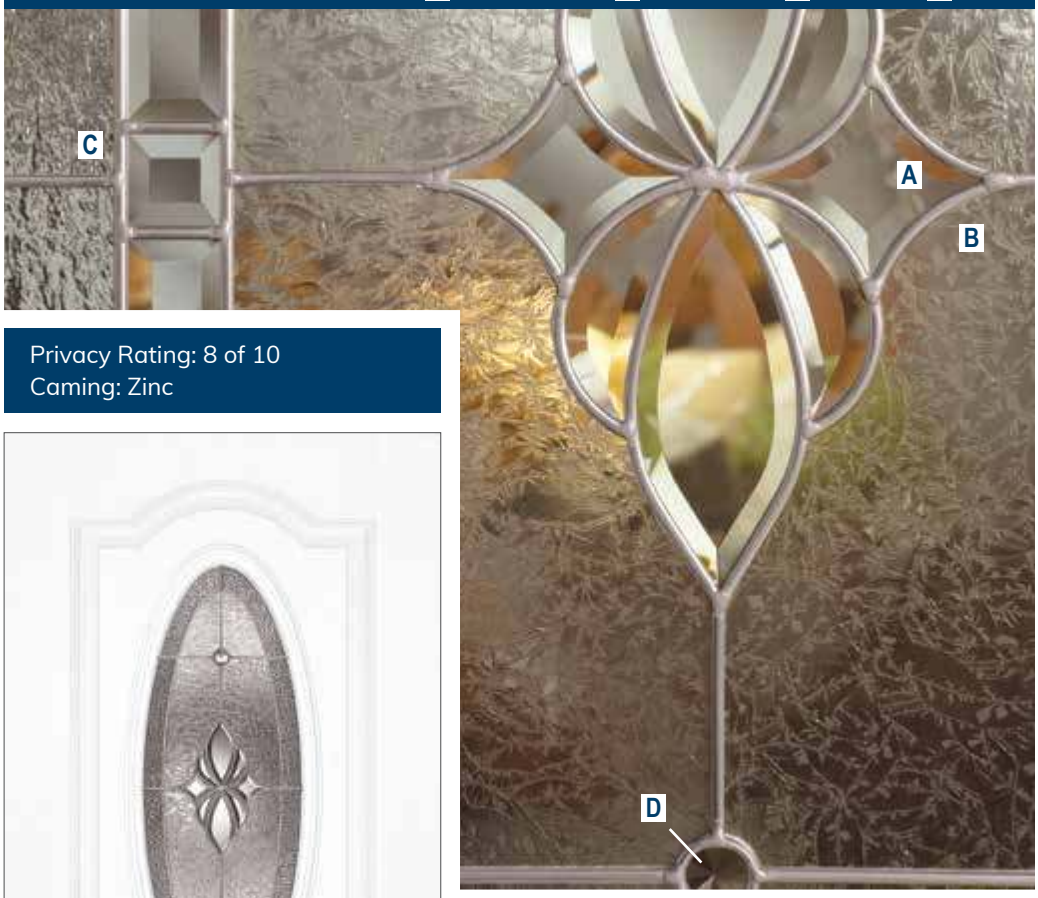


Privacy Rating: 8 of 10
Caming: Zinc

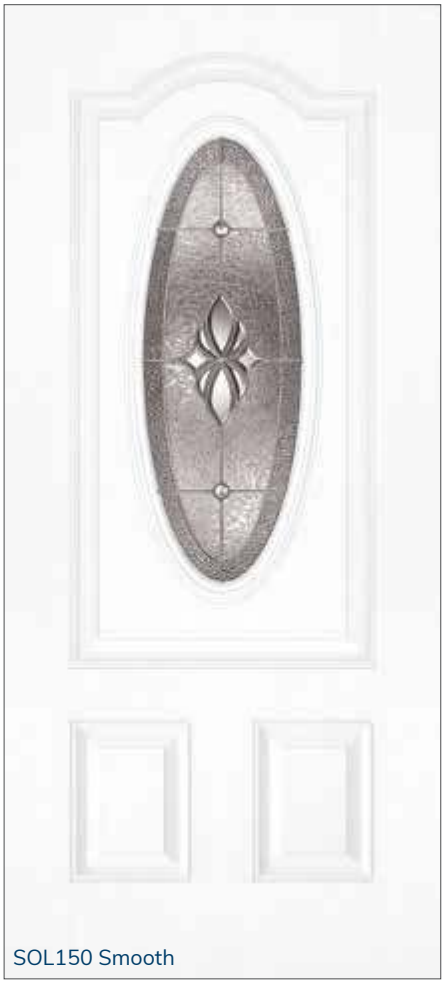

SOL150 Smooth


SOL430 Smooth

OAK



SMOOTH

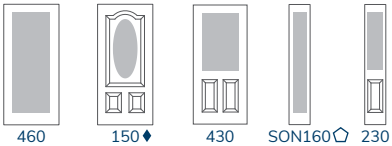

NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

✖ 32" also ⬠ 10" also
♦ 30", 32" & 34" also

6'8" height doors and sidelites

All doors and sidelites in the 6'8" Solitaire™ Collection are ENERGY STAR certified for all 50 states

CLASSIC

Glass Code = CLA

A Clear Bevel B Glue Chip
CLA400 is all Glue Chip Bevel glass




CLA400 Oak


Privacy Rating: 7 of 10
Caming: Zinc


CLA430 Oak


Classic™ 460 door with 160 sidelites
in Smooth pre-painted Tricorn Black


CLA460 Smooth

OAK

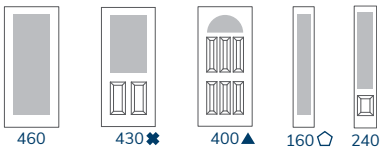

SMOOTH



NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

✖32" also ⬠10" also
▲34" also
♦30", 32" & 34" also


6'8" height doors and sidelites

All doors and sidelites in the
6'8" Classic Collection are
ENERGY STAR certified for all 50 states

IRON JANE™

Glass Code = IRJ


A Wrought Iron B Sandstone™

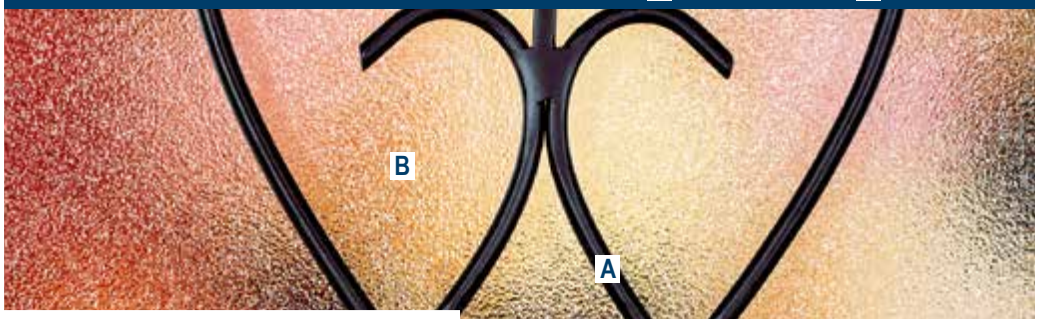


IRJ445 Mahogany

Privacy Rating: 8 of 10
Wrought Iron


IRJ430 Oak

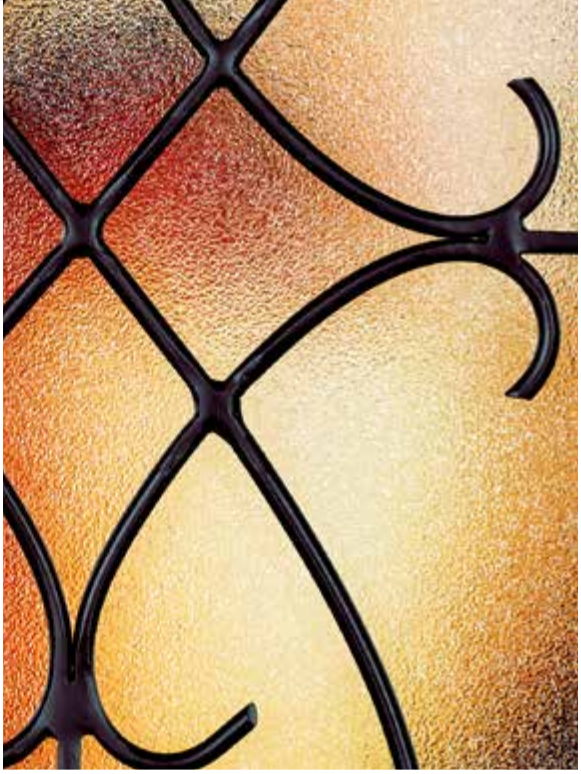


IRJ460 Smooth

NOTES


Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

✖ 32" also □ 14" only
△ 10" & 12" only
⬠ 10" also


6'8" height doors and sidelites

Most doors and sidelites in the 6'8" Iron Jane™ Collection are ENERGY STAR certified for all 50 states


MAHOGANY


445 160 △ 265 □

OAK


460 440✖ 430✖ 160⬠

SMOOTH


460 430 160⬠

Impact rated options available on page 35

PORTOFINO™

Glass Code = PTF

A Wrought Iron B Hammered




PTF445 Mahogany

Privacy Rating: 8 of 10
Wrought Iron





PTF160
Oak


PTF160
Smooth


PTF245
Mahogany

MAHOGANY



OAK



SMOOTH



NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

□ 14" only
△ 10" & 12" only
⬠ 10" also

6'8" height doors and sidelites


All doors and sidelites in the 6'8" Portofino™ Collection are ENERGY STAR certified for all 50 states


CRAFTSMAN COLLECTION

CAMERON™

Glass Code = CMR
Privacy Rating: 5 of 10
Caming: Zinc

- A Clear Bevel
- B Granite
- C Fluted
- D Seedy



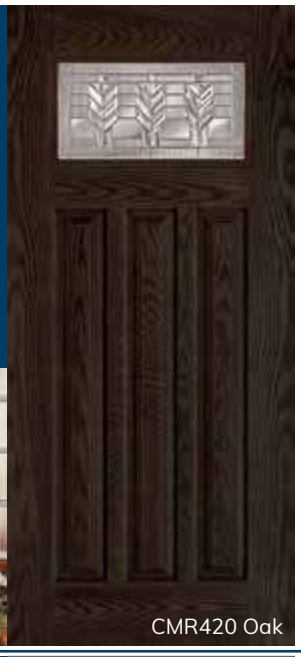
CMR420 Oak

OAK


420✖


SMOOTH


420★

SENA™


Glass Code = SEN
Privacy Rating: 8 of 10
Caming: Patina

- A Double Ripple Wave
- B Rose Ripple Wave
- C Amber Streak Opaque




SEN425 Mahogany


MAHOGANY


425^ 325^■ 425^▲

OAK


420✖


SMOOTH


325 ■ 425 ▲ 420★

LEHIGH®


Glass Code = LEH
Privacy Rating: 6 of 10
Caming: Patina

- A Clear Bevel
- B Double Granite
- C Fluted





LEH425 Smooth


MAHOGANY


425^ 425^▲

OAK


420✖


SMOOTH


425 ▲ 420★

CUBE™


Glass Code = CUB
Privacy Rating: 8 of 10
Caming: Patina, Zinc

- A Clear Bevel
- B Chinchilla
- C Pebble




CUB425 Mahogany


MAHOGANY


425^ 325^■ 425^▲


OAK


420✖

SMOOTH


325 ■ 425 ▲ 420★

Additional Options Available
Contact our sales team
for specific information





Impact rated options
available on page 35


^ Screwed-on dentil shelf option

NOTES

Unless otherwise noted:
– All doors available in 36"
▲ 34" also
✖ 32" also
★ 32" & 34" also
■ 30" & 32" only

6'8" height doors and sidelites

All doors in the Craftsman Collection are ENERGY STAR certified for all 50 states

METRO™

Triple Pane Obscure Glass



Modern contemporary flat lite frames



- Countless door cutout options available based on variety of frame shapes shown here – contact our sales team for specific information
- Not all glass options available for all door shapes – contact our sales team for specific information

NOTES

Unless otherwise noted:
– All doors available in 36"
■ 30" & 32" only

6'8" height doors and sidelites

See page 28 for glass detail images


Signamark offers ENERGY STAR certified door models for all 50 states. See pages 10-11.



CROSS REED
Glass Code = CRE
Privacy Rating: 8 of 10



HAMMERED
Glass Code = HAM
Privacy Rating: 8 of 10



PRIVACY
Glass Code = PVY
Privacy Rating: 9 of 10




REEDED
Glass Code = RED
Privacy Rating: 7 of 10




SANDSTONE™
Glass Code = SDS
Privacy Rating: 8 of 10



RAIN FALL™
Glass Code = RAI
Privacy Rating: 8 of 10

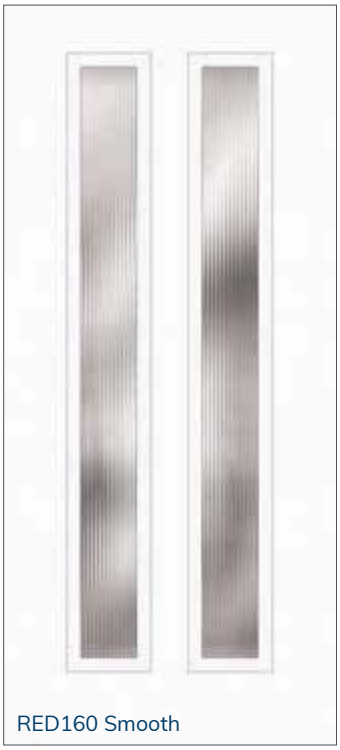


RED160 Smooth

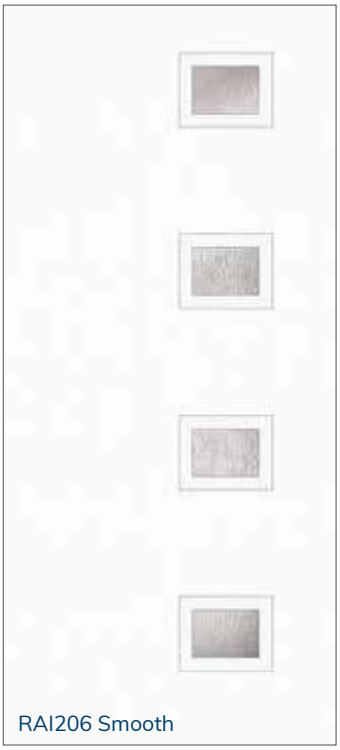

RAI206 Smooth



HAM206/230 Smooth

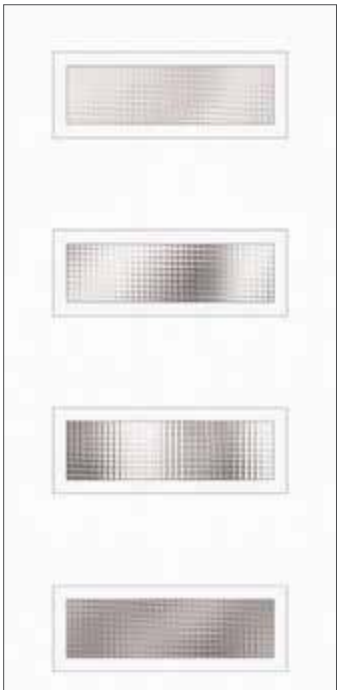

CRE232■ /236 Smooth



SDS310 Smooth



COR420 Smooth

TEXTURED OBSCURE COLLECTION

CORD

Glass Code = COR
Privacy Rating: 8 of 10
Triple Pane





CROSS REED

Glass Code = CRE
Privacy Rating: 8 of 10
Triple Pane

HAMMERED

Glass Code = HAM
Privacy Rating: 8 of 10
Triple Pane



PRIVACY

Glass Code = PVY
Privacy Rating: 9 of 10
Triple Pane

REEDED

Glass Code = RED
Privacy Rating: 7 of 10
Triple Pane






SANDSTONE™

Glass Code = SDS
Privacy Rating: 8 of 10
Triple Pane

RAIN FALL™

Glass Code = RAI
Privacy Rating: 8 of 10
Triple Pane

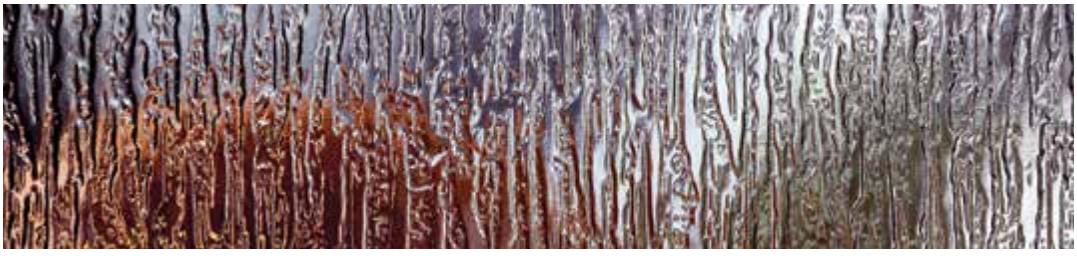



SDS525 Teak


COR525 4-Lite Teak



RAI420 Oak


COR425 Mahogany



PVY445 Mahogany

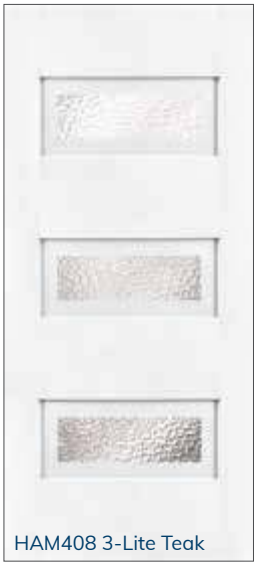
HAM408 3-Lite Teak



COR208 3-Lite Teak

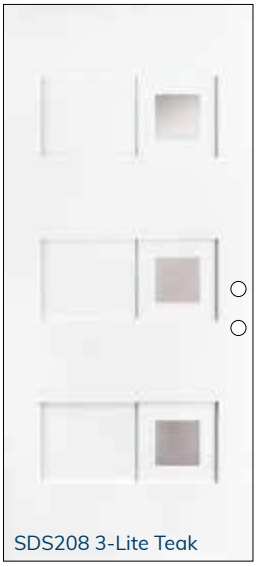
SDS208 3-Lite Teak



PVY208 3-Lite Teak

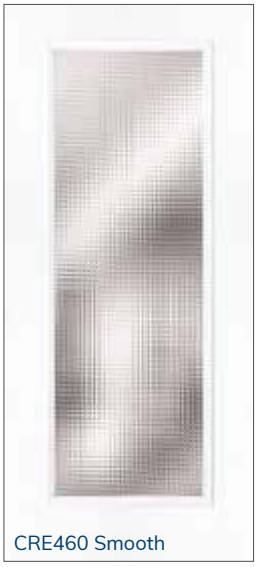
CRE460 Smooth


TEAK

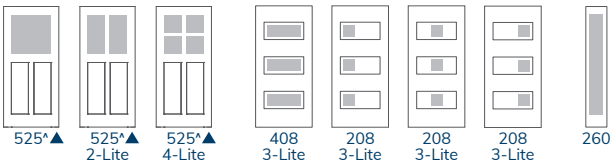


MAHOGANY



OAK

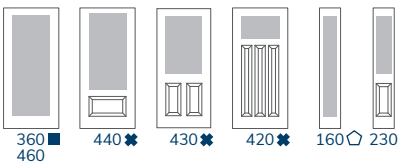

SMOOTH

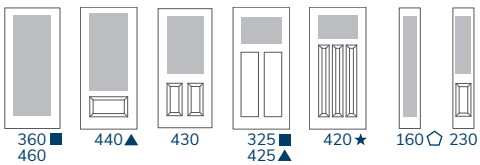

Metro™ smooth doors also available with textured obscure glass on page 27

Flush Glaze options with and without Simulated Divided Lites (SDLs) on pages 30-31

Transom options also available – contact our sales team for specific information

Not all glass options available for all door shapes – contact our sales team for specific information

NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

■ 30" & 32" only
▲ 34" also
✖ 32" also
★ 32" & 34" also
□ 14" only
△ 10" & 12" only
⬠ 10" also

6'8" height doors and sidelites


ˆ Screwed-on dentil shelf option

Impact rated options available on page 35

Signamark offers ENERGY STAR certified door models for all 50 states. See pages 10-11.


SIMULATED DIVIDED LITES (SDLs)



CORD
PR 8



SANDSTONE™
PR 8



REEDED
PR 7



CROSS REED
PR 8



HAMMERED
PR 8



RAIN FALL™
PR 8


PRIVACY
PR 9

CLEAR LOW-E
PR 1

Not all glass options available for all door shapes



SDL FEATURES

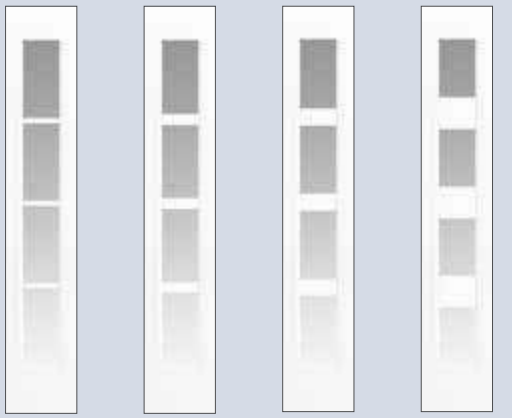

1–1/8" (1.125") **2–1/4" (2.25")** **3–1/2" (3.5")** **5–5/8" (5.625")**

- SDL bars are applied to both exterior and interior of glass
- SDL bars are non-removable
- SDL bar finish color and texture matches door
- All door and glass shown are also available without SDL bars
- Triple pane obscure glass
- Transoms available for Privacy and Clear Low-E glass

Bar profile



NOTES


Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"
■ 30" & 32" only

6'8" height Smooth doors and sidelites
8'0" height Teak doors and sidelites


Impact rated options available on page 35

Contact our sales team at 1 800 235 5533 for specific finishes and options
- Examples below -

6'8" SMOOTH FLUSH GLAZE

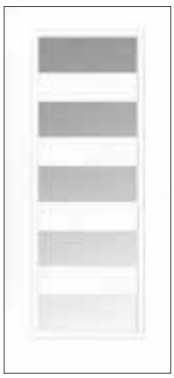

360■
460
5-Lite

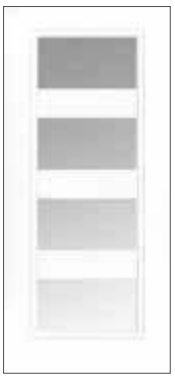

360■
460
4-Lite

FULL LITE
Grille Options:
2–1/4"
3–1/2"
5–5/8" (shown)



260
5-Lite



260
4-Lite




260
3-Lite

FULL LITE
Grille Options:
1–1/8"
2–1/4"
3–1/2" (shown)
5–5/8"

FRAME PROFILE
(Cross Section)

Smooth
Flush Glaze



8'0" TEAK WOODGRAIN FLUSH GLAZE



480
6-Lite



480
5-Lite

FULL LITE
Grille Options:
2–1/4"
3–1/2"
5–5/8" (shown)



280
6-Lite



280
5-Lite




280
4-Lite

FULL LITE
Grille Options:
2–1/4"
3–1/2" (shown)
5–5/8"

FRAME PROFILE
(Cross Section)

Teak
Flush Glaze






PANEL DOORS


917 Mahogany


600 Oak


620 Oak

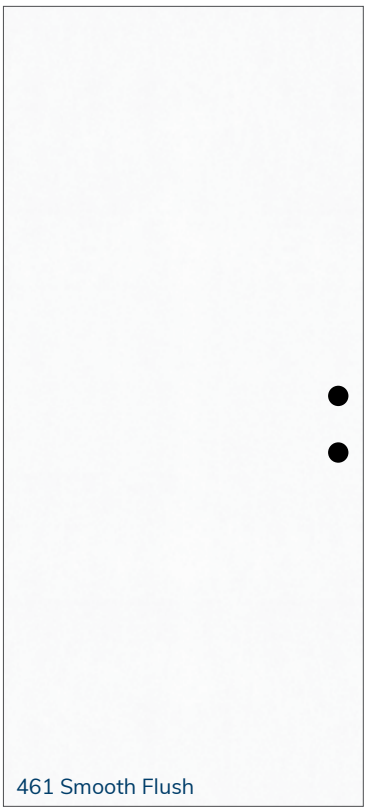
461 Smooth Flush



917 door with Portofino™ 160 sidelite in Chestnut Mahogany

Pair panel doors with any applicable sidelite


MAHOGANY


600 907 917☾ 949 461

OAK


600✖ 620✖ 461

SMOOTH


600☾ 620★ 461♦

Clavos options for 907 & 917


Square Round

TEAK


461

NOTES

Unless otherwise noted:
– All doors available in 36"
✖ 32" also
★ 32" & 34" also
☾ 30" & 32" also
♦ 30", 32" & 34" widths also

6'8" height doors and sidelites

HVHZ Impact rated options available on page 35

All doors and sidelites in the 6'8" Panel Collection are ENERGY STAR certified for all 50 states


BUILDER DOORS



BP601 Oak

Unfinished only

Standard builder panel profile

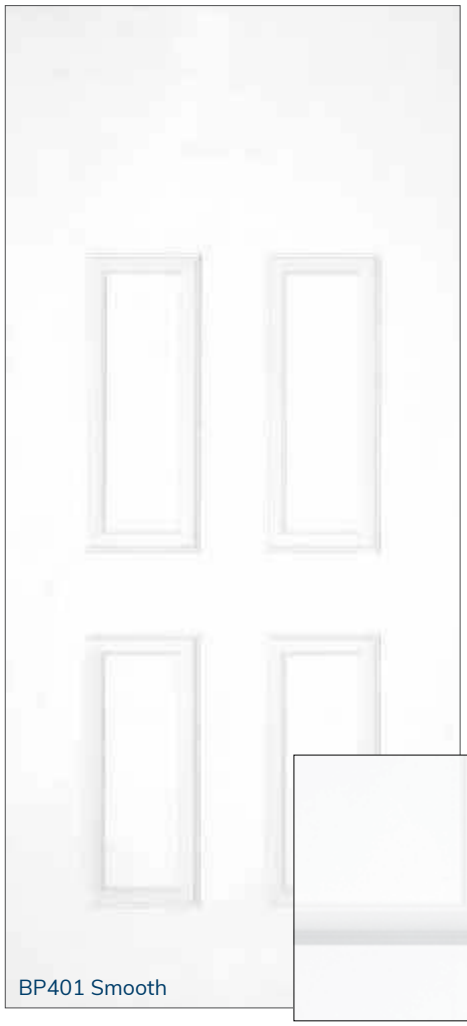

BP401 Smooth

Unfinished only


Standard builder panel profile

FIRE RATED

(FD601 only)



- Rated 20 minutes
- Standard builder panel profile

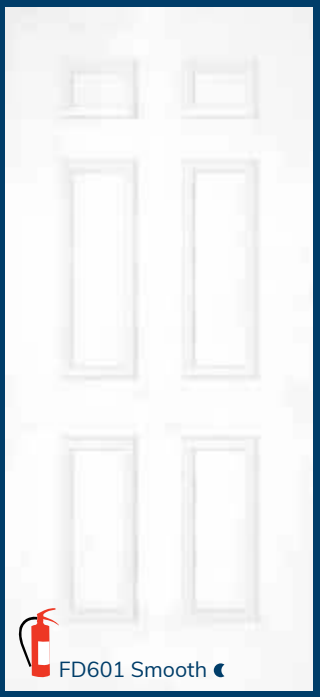


FD601 Smooth ☾




FD601 Oak ✖

OAK




BP461 BP401♦ BP601♦ BP147 BP161

CUTOUTS

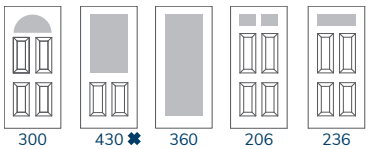


300 400 | 430 ✖ | 360 460 | 206 | 236




206 230 160 260

SMOOTH

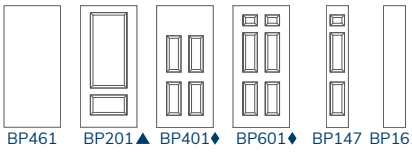


BP461 BP201▲ BP401♦ BP601♦ BP147 BP161

CUTOUTS

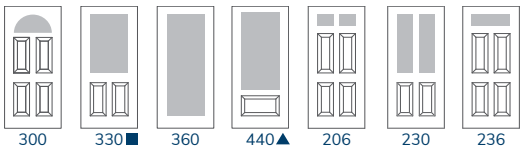

300 400 | 330 ■ 430 | 360 460 | 440▲ | 206 | 230 | 236



206 230 160 260

NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

✖ 32" also ■ 30" & 32" only ♦ 30", 32" & 34" also
▲ 34" also ☾ 30" & 32" also

6'8" height doors and sidelites

IMPACT

No Shutters Required
Flush-glazed Fiberglass Doors


DESIGNED TO MEET IMPACT REQUIREMENTS FOR "HVHZ" AREAS IN FLORIDA




High Performance Door & Frame System



Flush Glaze Frame

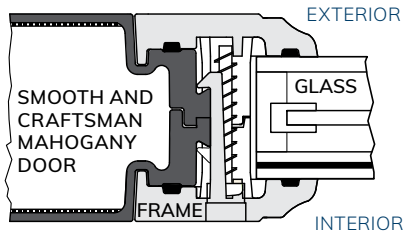

Mahogany Lip Lite Frame

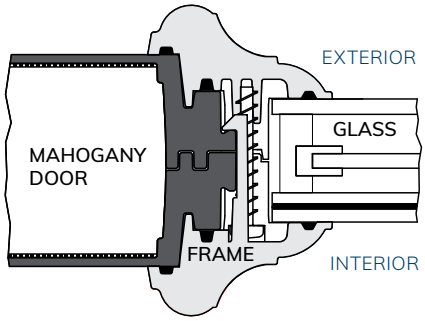

- Integrated Door, Frame, and Glass for Superior Performance
- Reinforced Fiberglass Door Skin
- Dual-Fastening Snap-Fit Frame Design
- Safety Laminated Glass Interior/ Safety Tempered Exterior —Interior: 1/8" x .090PVB x 1/8"

Durability
- Fiberglass door panels won't dent, rust, rot, or crack
- Ball bearing hinge prevents door sag and hinge wear for smooth operation
- PVC jambs will not rot or absorb moisture (no Sill Key™ System needed)
- Sill Key™ System (on wood jambs) doesn't allow jamb bottom to sit on sub floor or sill where it is susceptible to water damage**

Performance
- High-performance, dual-fastening snap-fit lite frame—Premium DP and Impact performance
- Flush glaze design—Optimal design and structural performance
- Triple-pane decorative glass with safety laminated interior—energy-efficient and Impact resistant
- 100% CFC-free polyurethane foam core—Energy-efficient insulation and environmentally friendly

Design
- True resemblance of a real wood door
  Woodgrain: Unique detail in every design
  Smooth: Crisp design and paintable to match any décor
- Lite frame and stile alignment—Architecturally correct design
- Matching glass caming, sill, and hinge finish provides enhanced look and appearance
- High-definition panel embossments give elegant curb appeal

FLORIDA BUILDING CODE TESTING INFORMATION

DOOR TYPE	TESTING NUMBER	SWING	Panel/Opaque / "Glazed"				
Panel/ Opaque	FL# 20867.2	Outswing	DP Rating	±75	+60 / −70	±55	±55
			Impact	Yes	Yes	Yes	Yes
Glazed	FL# 20867.1	Outswing	DP Rating	± 60*	+60 / −70	±55	±55
			Impact	Yes	Yes	Yes	Yes


Visit signamark.com for Evaluation Reports and Drawings (go to "Performance Data"). You can also view Evaluation Reports/Drawings at floridabuilding.org.

Doors with sidelite(s) are continuous head & sill. DP Ratings shown are based on wood jambs. PVC Jamb DP Ratings on website.

* 3/4 Oval DP Rating: + 75 / - 75 (Smooth)
** Maximum protection is achieved only when the door system is installed and caulked properly


ST. JANE®


MAHOGANY SMOOTH

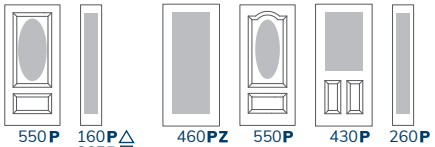

PRESTON®


TEAK SMOOTH



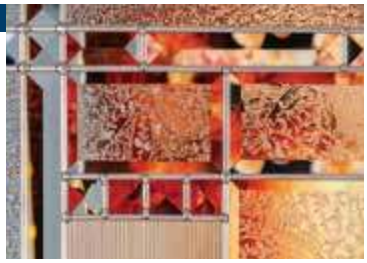


CUBE™

MAHOGANY SMOOTH

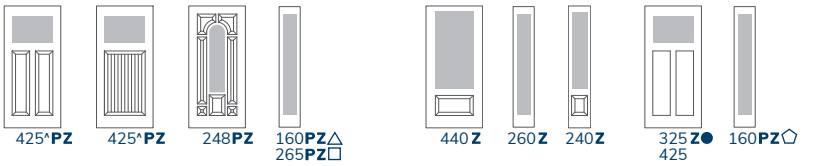


TURQUOISE™

SMOOTH



CORD


MAHOGANY SMOOTH TEAK

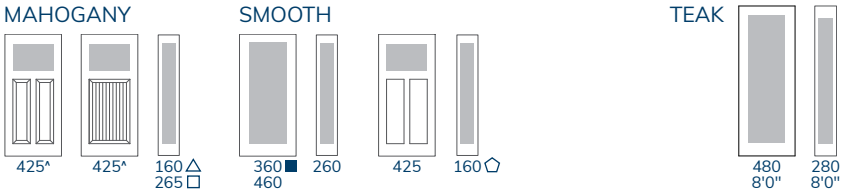

Flush Glaze options with and without Simulated Divided Lites (SDLs) on pages 30-31


LEHIGH®

MAHOGANY SMOOTH



PRIVACY and SANDSTONE™


MAHOGANY SMOOTH TEAK

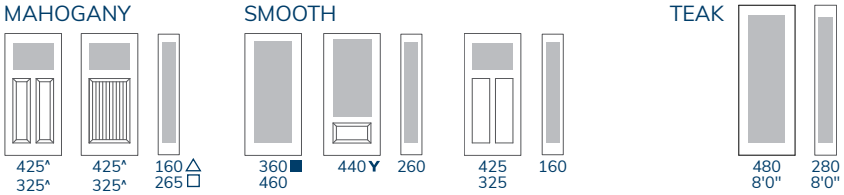

Flush Glaze options with and without Simulated Divided Lites (SDLs) on pages 30-31


IRON JANE™

SMOOTH TEAK

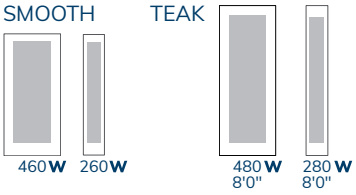

CLEAR LOW-E


SMOOTH TEAK

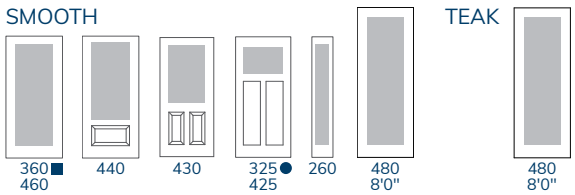

Flush Glaze options with and without Simulated Divided Lites (SDLs) on pages 30-31

MINI BLINDS LOW-E

SMOOTH TEAK

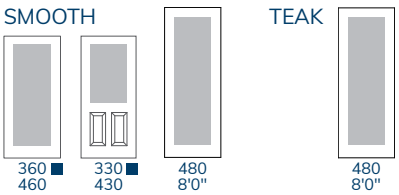

See Page 37 for details


PANEL

MAHOGANY SMOOTH



8'0" PANEL & FLUSH

TEAK MAHOGANY SMOOTH

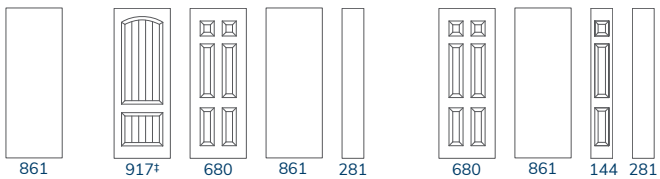



^ Screwed-on dentil shelf option

‡ Square and round clavos options 

Y Privacy glass only

NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

■ 30" & 32" only
◖ 30" & 32" also
✖ 32" also
● 30" only

⬠ 10" also
□ 14" only
△ 10" & 12" only


P Patina caming
Z Zinc caming
W Wrought iron

6'8" height doors and sidelites


CLEAR LOW-E

Glass Code = CLR


OAK

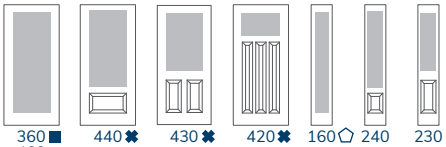


SMOOTH

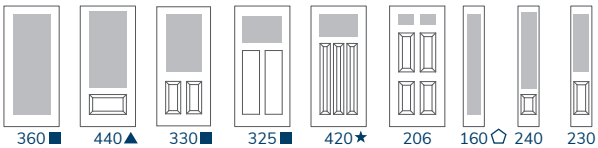

MAHOGANY





^ Screwed-on dentil shelf option

Transom options also available – contact our sales team for specific information




CLR460 Smooth


INTERNAL GRILLE LOW-E

Glass Code = GBG

OAK

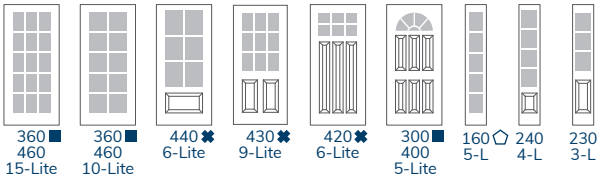


SMOOTH

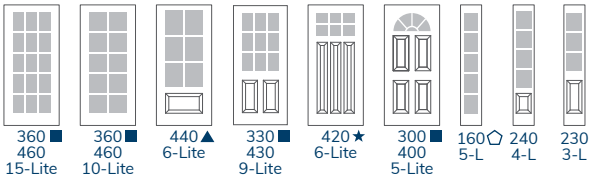


GRILLE OPTIONS

3/4" Contour Profile

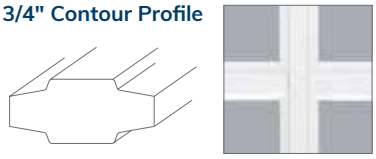

5/8" Flat Bar Profile

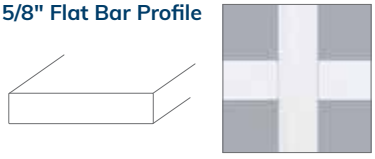




GBG430 9-Lite Smooth

MOLDED SDL GRILLES

Glass Code = CGS

MAHOGANY





Mahogany Only


Bronze spacer and shadow bars will come standard on all doors with the 3-Lite or 6-Lite Grille profile along with the 2-Lite Sidelite.

SMOOTH





CGS425 6-Lite^ Mahogany



^ Screwed-on dentil shelf option

NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

■ 30" & 32" only ⬠ 10" also
✖ 32" also
★ 32" & 34" also
▲ 34" also


6'8" height doors and sidelites

All doors and sidelites in the 6'8" Clear Low-E, Internal Grille Low-E, and Molded SDL Grilles Collections are ENERGY STAR certified for all 50 states


INTERNAL MINI BLINDS LOW-E

Glass Code = MBL

OAK



SMOOTH





Dual function:
Raise/Lower and Tilt

Single Operator

Standard 1/2" Slats




MBL460 Smooth


IMPACT INTERNAL MINI BLINDS LOW-E

Glass Code = MBL

SMOOTH



OAK / SMOOTH



Flush Glazed Doors
See page 35 for Impact door information



Dual function:
Raise/Lower and Tilt

Dual Operator

3/8" Slats

Flush Profile Lite Frame

Paintable Lite Frame




MBL430 Smooth

VENT LITES LOW-E

Glass Code = VNT

SMOOTH



NOTES

Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 12" and 14"

■ 30" & 32" only ⬠ 10" also
✖ 32" also
▲ 34" also

6'8" height doors and sidelites

Locking latch



Window handle for easy operation



Ergonomic vent handles





VNT460 Smooth



VNT430 Smooth


LEH480 Teak

8'0" HEIGHT

Signamark offers ENERGY STAR certified door models for all 50 states. See pages 10-11.

HVHZ Impact rated options available on page 35

NOTES


Unless otherwise noted:
– All doors available in 36"
– All sidelites available in 14"

- ♣ 42" also
- ◊ 12" also
- □ 12" also, Smooth only
- **P** Patina caming
- **Z** Zinc caming
- **W** Wrought iron


♦ Available in Smooth only

ST. JANE®

MAHOGANY



445 **Z**

OAK / SMOOTH



460 **P Z** 440 **P Z**

SENA™

TEAK / MAHOGANY



525^ **P** 280 **P** ◊

OAK / SMOOTH


260 **P** ♦ 260 **P** □


PORTOFINO™

MAHOGANY


445 **W**


TURQUOISE™

OAK / SMOOTH


460 **Z**


PROVENCE™

OAK / SMOOTH



460 **P Z** 240 **Z** ♦ 240 **Z** □

STELLAR™

MAHOGANY


445 **P Z**

OAK / SMOOTH



460 **P Z** 440 **P** 240 **Z** ♦ 240 **Z** □

LEHIGH®


TEAK


480 **P**

MAHOGANY



445 **P**

OAK / SMOOTH



480 **P** 460 **P Z** 440 **P Z**

PALM SPRINGS™

MAHOGANY



445 **Z**

OAK / SMOOTH



460 **Z** 440 **Z**

IRON JANE™


TEAK


480 **W** 280 **W** ◊

MAHOGANY



445 **W** 280 **W** ◊

OAK / SMOOTH



480 **W** 460 **W** 440 **W**

CUBE™

TEAK



525^ **P Z**

OAK / SMOOTH

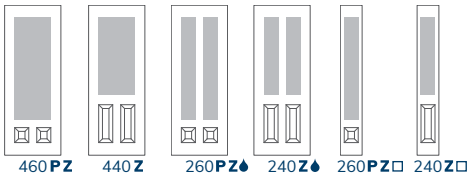
460 **P Z** 440 **Z** 260 **P Z** ♦ 240 **Z** ♦ 260 **P Z** □ 240 **Z** □

LONE STAR™

MAHOGANY


445 **P**

OAK / SMOOTH


240 **Z** ♦ 240 **Z** □

SOLITAIRE™

OAK



460 **Z**

SMOOTH


460 **Z**

CLASSIC

OAK / SMOOTH



460 **Z** 240 **Z** 240 **Z** □


COR525 Teak



STJ460 Oak

PRIVACY

TEAK

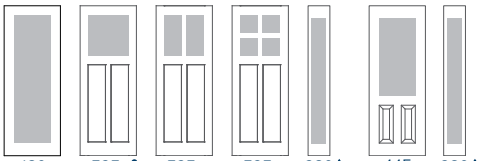


OAK / SMOOTH

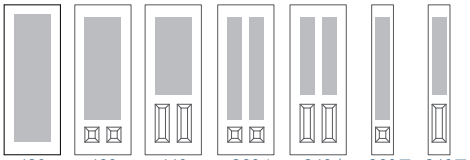


SANDSTONE™

TEAK

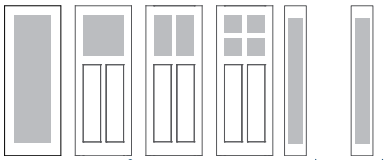


OAK / SMOOTH

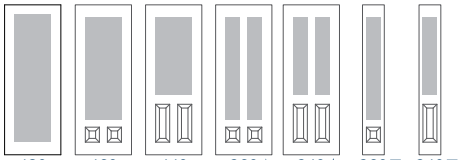


METRO™ SMOOTH


1-Lite Straight




4-Lite Straight



3-Lite Straight




Other




Metro™ available with Textured Obscure glass. Countless door cutout options available based on variety of frame shapes shown here – contact our sales team for specific information.

CROSS REED

TEAK




OAK / SMOOTH




CORD

TEAK

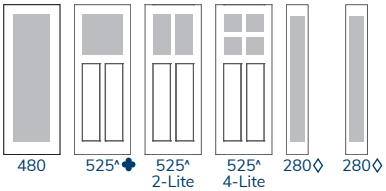


OAK / SMOOTH

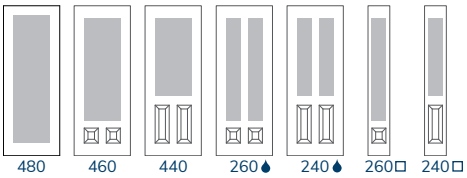


HAMMERED

TEAK

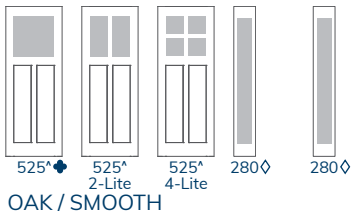


OAK / SMOOTH




REEDED

TEAK




OAK / SMOOTH




RAIN FALL™

TEAK



OAK / SMOOTH




Flush Glaze options with and without Simulated Divided Lites (SDLs) on page 30-31




^ Screwed-on dentil shelf option


CLEAR LOW-E

TEAK




OAK / SMOOTH





MINI BLINDS LOW-E

OAK / SMOOTH




PANEL


TEAK




MAHOGANY




OAK




SMOOTH



ROUGH OPENING, DOOR SWING & HANDING

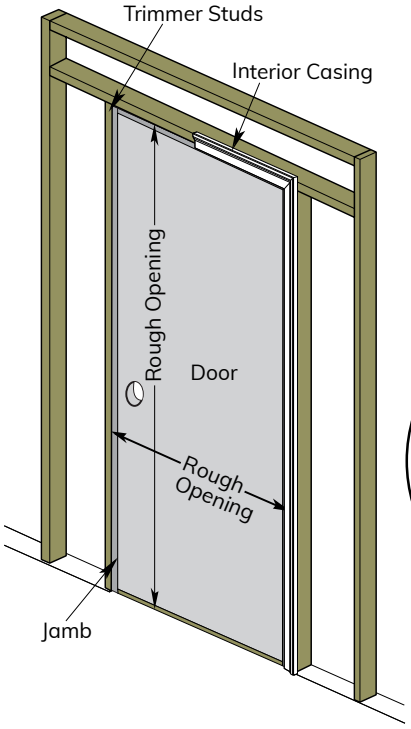

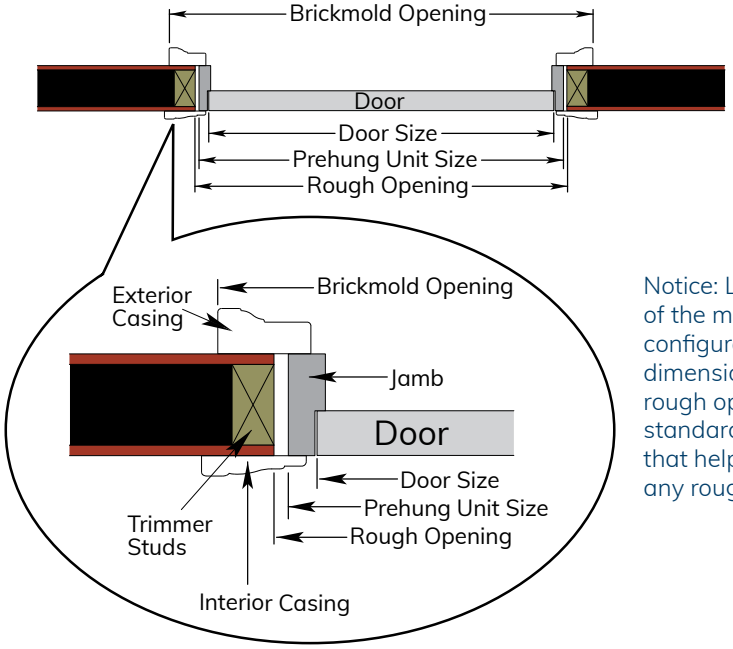


Notice: Listed at right are some of the most common door configurations, with rough opening dimensions. If you find that your rough opening does not match the standard sizes, we have options that help to accommodate almost any rough opening size.

Doors with Sidelite(s): **Rough Opening sizes shown on page 41 are for a standard continuous head and sill setup with primed wood jamb or unfinished PVC jamb.**
Note: Some PVC jamb options may add 1/2" per sidelite to the width shown in the chart at right (this will be a continuous head and sill unit, but at a box construction size).

Box Construction Size Option: We also offer our doors in box construction size depending on jamb option. This size adds 1/2" to the measurements shown per sidelite.

PRE-HUNG SETUP CONSTRUCTION EXAMPLES

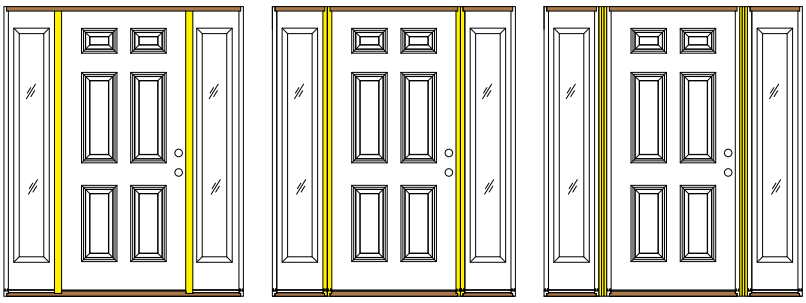

Continuous head and sill | Box construction | Box construction with spread mullion

Box Construction with Spread Mull Option: Allows for a 1/2" to 3" spread between door and sidelite. Built as standard box construction and only available on certain jamb options.
Double Door with Two Sidelites: Only available in Box Construction as standard and no Spread Mullion.

Outswing Units: Come standard with a Bumper-Style Sill, which requires that you subtract 1–1/8" from the Prehung Unit and Rough Opening height. Also add 1/2" to Brickmold Opening for width.


Wheelchair Accessible: Subtract 7/8" from any of the heights shown.

Threshold: Inswing Units – Threshold height is 1–3/8", which allows for approximately 1" opening clearance. If a spacer is needed under sill to allow for proper opening clearance, please adjust rough opening accordingly.

Transom: To calculate heights for combined doors and transoms, add the transom height to the chart height.

DOOR SWING & HANDING

Viewed From The Outside

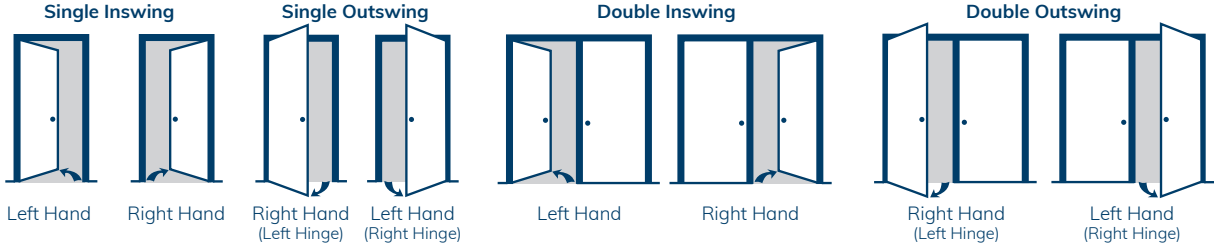


ROUGH OPENING CHART


NOMINAL DOOR WIDTH	NOMINAL DOOR HEIGHT	PREHUNG UNIT SIZE	ROUGH OPENING	BRICKMOLD OPENING
14"	6/8	15–1/2" x 81–5/8"	16–1/4" x 82–1/8"	18" x 82–7/8"
12"	6/8	13–1/2" x 81–5/8"	14–1/4" x 82–1/8"	16" x 82–7/8"
10"	6/8	11–5/8" x 81–5/8"	12–3/8" x 82–1/8"	14–1/8" x 82–7/8"
14"	7/0	15–1/2" x 85–5/8"	16–1/4" x 86–1/8"	18" x 86–7/8"
14"	8/0	15–1/2" x 97–5/8"	16–1/4" x 98–1/8"	18" x 98–7/8"
12"	8/0	13–1/2" x 97–5/8"	14–1/4" x 98–1/8"	16" x 98–7/8"
36"	6/8	37–1/2" x 81–5/8"	38–1/4" x 82–1/8"	40" x 82–7/8"
34"	6/8	35–1/2" x 81–5/8"	36–1/4" x 82–1/8"	38" x 82–7/8"
32"	6/8	33–1/2" x 81–5/8"	34–1/4" x 82–1/8"	36" x 82–7/8"
30"	6/8	31–1/2" x 81–5/8"	32–1/4" x 82–1/8"	34" x 82–7/8"
36"	7/0	37–1/2" x 85–5/8"	38–1/4" x 86–1/8"	40" x 86–7/8"
36"	8/0	37–1/2" x 97–5/8"	38–1/4" x 98–1/8"	40" x 98–7/8"
42"	8/0	43–1/2" x 97–5/8"	44–1/4" x 98–1/8"	46" x 98–7/8"
36"–14"SL	6/8	52–1/2" x 81–5/8"	53–1/4" x 82–1/8"	55" x 82–7/8"
36"–12"SL	6/8	50–1/2" x 81–5/8"	51–1/4" x 82–1/8"	53" x 82–7/8"
36"–10"SL	6/8	48–5/8" x 81–5/8"	49–3/8" x 82–1/8"	51–1/8" x 82–7/8"
32"–14"SL	6/8	48–1/2" x 81–5/8"	49–1/4" x 82–1/8"	51" x 82–7/8"
32"–12"SL	6/8	46–1/2" x 81–5/8"	47–1/4" x 82–1/8"	49" x 82–7/8"
36"–14"SL	7/0	52–1/2" x 85–5/8"	53–1/4" x 86–1/8"	55" x 86–7/8"
36"–14"SL	8/0	52–1/2" x 97–5/8"	53–1/4" x 98–1/8"	55" x 98–7/8"
36"–12"SL	8/0	50–1/2" x 97–5/8"	51–1/4" x 98–1/8"	53" x 98–7/8"
42"–14"SL	8/0	58–1/2" x 97–5/8"	59–1/4" x 98–1/8"	61" x 98–7/8"
36"–14"SL	6/8	67–1/2" x 81–5/8"	68–1/4" x 82–1/8"	70" x 82–7/8"
36"–12"SL	6/8	63–1/2" x 81–5/8"	64–1/4" x 82–1/8"	66" x 82–7/8"
36"–10"SL	6/8	59–3/4" x 81–5/8"	60–1/2" x 82–1/8"	62–1/4" x 82–7/8"
32"–14"SL	6/8	63–1/2" x 81–5/8"	64–1/4" x 82–1/8"	66" x 82–7/8"
32"–12"SL	6/8	59–1/2" x 81–5/8"	60–1/4" x 82–1/8"	62" x 82–7/8"
36"–14"SL	7/0	67–1/2" x 85–5/8"	68–1/4" x 86–1/8"	70" x 86–7/8"
36"–14"SL	8/0	67–1/2" x 97–5/8"	68–1/4" x 98–1/8"	70" x 98–7/8"
36"–12"SL	8/0	63–1/2" x 97–5/8"	64–1/4" x 98–1/8"	66" x 98–7/8"
42"–14"SL	8/0	73–1/2" x 97–5/8"	74–1/4" x 98–1/8"	76" x 98–7/8"
72" (36–36)	6/8	74" x 81–5/8"	74–3/4" x 82–1/8"	76–1/2" x 82–7/8"
68" (34–34)	6/8	70" x 81–5/8"	70–3/4" x 82–1/8"	72–1/2" x 82–7/8"
64" (32–32)	6/8	66" x 81–5/8"	66–3/4" x 82–1/8"	68–1/2" x 82–7/8"
60" (30–30)	6/8	62" x 81–5/8"	62–3/4" x 82–1/8"	64–1/2" x 82–7/8"
72" (36–36)	7/0	74" x 85–5/8"	74–3/4" x 86–1/8"	76–1/2" x 86–7/8"
72" (36–36)	8/0	74" x 97–5/8"	74–3/4" x 98–1/8"	76–1/2" x 98–7/8"
84" (42–42)	8/0	86" x 97–5/8"	86–3/4" x 98–1/8"	88–1/2" x 98–7/8"
88" (12–32–32–12)	6/8	93" x 81–5/8"	93–3/4" x 82–1/8"	95–1/2" x 82–7/8"
96" (12–36–36–12)	6/8	101" x 81–5/8"	101–3/4" x 82–1/8"	103–1/2" x 82–7/8"
92" (14–32–32–14)	6/8	97" x 81–5/8"	97–3/4" x 82–1/8"	99–1/2" x 82–7/8"
100" (14–36–36–14)	6/8	105" x 81–5/8"	105–3/4" x 82–1/8"	107–1/2" x 82–7/8"
100" (14–36–36–14)	7/0	105" x 85–5/8"	105–3/4" x 86–1/8"	107–1/2" x 86–7/8"
100" (14–36–36–14)	8/0	105" x 97–5/8"	105–3/4" x 98–1/8"	107–1/2" x 98–7/8"
100" (12–36–36–12)	8/0	101" x 97–5/8"	101–3/4" x 98–1/8"	103–1/2" x 98–7/8"


Limited transoms available – contact our sales team for specific information


TRANSOMS











Heights 12" & 14–3/4" unless otherwise noted

12" height only

Widths listed next to configuration

DESIGNED TO MEET IMPACT REQUIREMENTS FOR "HVHZ" AREAS IN FLORIDA

Rough openings for HVHZ (Impact) are smaller than Rough Opening Chart sizes.
Maximum space between Actual Unit Size and Rough Opening is 1/2" in width and 1/4" in height.

LIMITED LIFETIME WARRANTY

For Purchases Made On or After August 1, 2018

Signamark fiberglass exterior entry and patio door systems, door slabs and other components (hereinafter Product) by Trinity Glass International, Inc. (hereinafter Trinity) are warranted to be free from defects in material and workmanship that would render the Product unfit for its intended use under normal conditions, subject to the conditions and restrictions contained herein. This warranty extends only to the original purchaser of the Product (hereinafter Customer) from Trinity, from the date the Product is first purchased and extending to the following periods:

Limited Lifetime Warranty on all door slabs and sidelite slabs
Limited Lifetime Warranty on PVC jambs, brickmoulds and mullions
Limited Lifetime Warranty on doorlite (glass) frames
10 Years Limited Warranty on insulated glass against seal failure
5 Years Limited Warranty on factory finish (paint and stain)
2 Years Limited Warranty on wood products (i.e. jambs, brickmoulds, mullion) and all other components not specified in this warranty

The following are exceptions that may void the warranty or are not otherwise considered to be defects in material or workmanship:

1. Damage caused by failure to comply with the installation, finishing and maintenance instructions and recommendations by Trinity.
2. Damage caused by improper storage and handling, abuse, abnormal and unreasonable use by the Customer or other parties beyond the control of Trinity, to include but not limited to damages caused during shipping, handling, installation, or any act(s) performed to the Products not in compliance with Trinity's instructions and recommendations.
3. Damage from harsh natural conditions, including but not limited to substantial exposure to sun, salt spray, lightning, windstorms, earthquakes, acts of God, and other severe environmental conditions including but not limited to harsh chemicals or solvents, such as acidic brick washes or stucco leach.
4. Broken or shattered glass, normal wear and tear of components, improper maintenance, improper cleaning, improper caulking, and damage caused by pets or wild animals.
5. Bowing not exceeding 1/4 inch in the plane of the door. This shall be determined by placing a straight edge on the bowed surface of the door and measuring the point of maximum distance between the bottom of the straight edge and the surface of the door, accounting for panels and glazing recesses.
6. For unfinished Products, failure to properly finish all door/sidelite/transom surfaces and/or jamb materials within 2 weeks of installation or 6 months from the date of purchase, whichever is sooner.
7. Natural variations in color or texture of any wood grain surface shall not be considered a defect. When exposed to direct sunlight over long periods of time, discoloration may occur, but this will be within the accepted tolerances contained within 5 Delta E units, calculated in accordance with ASTM E 308-85, ASTM E 805-81 and ASTM D 2244-85, effective on the date the product is manufactured. Non-uniform fading and/or color changes are natural occurrences if the exterior surfaces of the products are not equally exposed to the sun and other environmental conditions.
8. Natural conditions created during the manufacturing process used in making decorative glass panels such as bubbles, streaks and swirls in decorative glass shall not be considered a defect. Irregularity in glass that is not visible from farther than six feet shall not be considered defects.
9. Any damage caused by improper installation of a storm door or the installation of a non-ventilating, full glass storm door shall void this warranty.
10. This warranty applies only to Products installed in owner occupied residential dwellings within the U.S., during the Customer's ownership, and is non-transferable.
11. Repaired or replaced components are warranted on the same terms and only for the remainder of the original warranty period. Color and grain match are not guaranteed. Trinity reserves the right to discontinue or change products or components. If a product or component is not available, Trinity may select and provide a like product or component of equal quality and price.

Warranty Claim Procedures:
In the event of a defect covered under this warranty, Customer shall comply with the following claim procedures:

1. Written warranty claim shall be presented to Trinity.
2. Customer's written claim must include the following information:
   - Nature or adequate description of defect(s).
   - Identification of product including size, design, type, and product number (if available).
   - Date of purchase.
   - Proof of purchase.
3. Upon Trinity's request, Customer must permit Trinity (or its representative) to inspect the claimed defective Product and provide photographs of the defective Product. Trinity shall have 30 days from receipt of Customer's written claim to exercise this option to inspect.

Upon receipt of a valid claim, Trinity shall have the option to either repair the product or provide a replacement product of like kind and design. Further, in lieu of repair or replacement, Trinity reserves the right to refund the Customer's purchase price (not replacement price). THIS SHALL BE THE CUSTOMER'S SOLE AND EXCLUSIVE REMEDY, AND IN NO EVENT SHALL TRINITY BE RESPONSIBLE FOR LABOR, SHIPPING, FINISHING EXPENSES, REMOVAL OF PRODUCT, INSTALLATION OF REPLACEMENT PRODUCT, OR OTHER INCIDENTAL AND/OR CONSEQUENTIAL CHARGES, COSTS, EXPENSES OR CLAIMS INCURRED BY CUSTOMER.


If Trinity elects to refund the purchase price, this warranty will be prorated from the date of purchase in the following manner: 0-5 years, 100% of the original purchase price; 6-10 years, prorated at 75% of original purchase price; and 11 years and up, 50% of original purchase price.

Trinity makes no other warranty, including a warranty of merchantability or fitness for a particular purpose, with respect to the product or replacement except to the extent provided herein. Invalidation of any one or more of the provisions of this limited warranty shall in no way affect any of the provisions in this limited warranty which remain in full force and effect. Any and all legal actions for any and every breach of this warranty shall be instituted and maintained in any court of competent jurisdiction in the County of King, State of Washington. Trinity reserves the right to modify the terms and conditions of this warranty without prior notice.

FINISHING INSTRUCTIONS

SIGNAMARK HAND STAINED DOORS: Signamark hand stained doors already come with a polyurethane UV top coat which protects the door during the 5 year finish warranty. It does not require additional topcoats at time of purchase but you will need to apply additional topcoats after 2-5 years as mentioned in the Care and Maintenance section below.

PAINTED FINISH: SMOOTH FIBERGLASS DOORS
SMOOTH FIBERGLASS DOORS: You can use any high quality oil based or latex based exterior paint. Priming the door is not required, but we do recommend a light sanding with 600 grit sandpaper for better paint adhesion. Before applying a paint, wipe the door and doorlite frame with a damp cloth to remove any dirt, oil, or debris. Allow the surface to fully dry before painting. For a pleasing look, we recommend painting with strokes in the directions shown. Apply at least two coats of paint, following the paint manufacturer's recommended instructions along with drying time between coats.

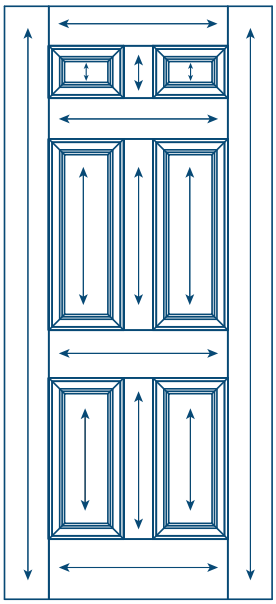

CARE AND MAINTENANCE
We recommend on any hand stained product that you reapply a UV topcoat over the existing topcoat every 2-5 years to protect your beautiful entryway from harsh weathering. We do not recommend stripping the finish. In locations with severe weather exposure, more frequent maintenance may be required. Caulk as well as repaint your doors as soon as deterioration can be detected.

SIGNAMARK®

Fiberglass Entry Door Systems

SELECT PROGRAM OFFERING



Contact our sales team at 1 800 235 5533 for specific finishes and options

2/24b © 2024 Trinity Glass International, Inc.